

PRELIMINARY

NEC NEC LCD Technologies, Ltd.

TFT COLOR LCD MODULE

NL12876AC39-01

58.4cm (23.0 Type)

WXGA

PRELIMINARY DATA SHEET 

DOD-PD-0087 (8th edition)

This PRELIMINARY DATA SHEET is updated document from DOD-M-0976(7).

All information is subject to change without notice. Please confirm the sales representative before starting to design your system.

INTRODUCTION

No part of this document shall be copied in any form or by any means without the prior written consent of NEC LCD Technologies, Ltd. (hereinafter called "NEC").

NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a product described herein or any other liability arising from use of such application. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or of others.

While NEC has been making continuous effort to enhance the reliability of its products, the possibility of failures cannot be eliminated entirely. To minimize risks of damage to property or injury to person arising from a failure in an NEC product, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.

NEC products are classified into the following three quality grades:

"Standard", "Special", "Specific"

The *"Specific"* quality grade applies only to applications developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a product depend on its quality grade, as indicated below. Customers must check the quality grade of each application before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Military systems, aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems (medical equipment, etc.) and any other equipment

The quality grade of this product is *"Standard"* unless otherwise specified in this document. If customers intend to use this product for applications other than those specified for *"Standard"* quality grade, they should contact NEC sales representative in advance.

PRELIMINARY

CONTENTS

INTRODUCTION	2
1. OUTLINE	5
1.1 STRUCTURE AND PRINCIPLE	5
1.2 APPLICATIONS	5
1.3 FEATURES	5
2. GENERAL SPECIFICATIONS	6
3. BLOCK DIAGRAM	7
4. DETAILED SPECIFICATIONS	8
4.1 MECHANICAL SPECIFICATIONS	8
4.2 ABSOLUTE MAXIMUM RATINGS.....	8
4.3 ELECTRICAL CHARACTERISTICS	9
4.3.1 Driving for LCD panel signal processing board.....	9
4.3.2 Driving for backlight inverter.....	9
4.3.3 Power supply voltage ripple	10
4.3.4 Fuse	10
4.4 POWER SUPPLY VOLTAGE SEQUENCE.....	11
4.4.1 Sequence for LCD panel signal processing board.....	11
4.4.2 Sequence for backlight inverter.....	11
4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS	12
4.5.1 LCD panel signal processing board.....	12
4.5.2 Backlight inverter	13
4.5.3 Positions of sockets	13
4.5.4 Connection between receiver and transmitter for LVDS.....	14
4.6 LUMINANCE CONTROLS	15
4.6.1 Luminance control methods	15
4.6.2 Detail of PWM timing	16
4.7 DISPLAY COLORS AND INPUT DATA SIGNALS	17
4.8 DISPLAY POSITIONS	18
4.9 SCANNING DIRECTIONS.....	18
4.10 INPUT SIGNAL TIMINGS FOR LCD PANEL SIGNAL PROCESSING BOARD.....	19
4.10.1 Outline of input signal timings	19
4.10.2 Detailed input signal timing chart for DE mode.....	19
4.10.3 Timing characteristics.....	20
4.11 OPTICS	21
4.11.1 Optical characteristics.....	21
4.11.2 Definition of contrast ratio	22
4.11.3 Definition of luminance uniformity.....	22
4.11.4 Definition of response times.....	22
4.11.5 Definition of viewing angles	22
5. RELIABILITY TESTS	23

PRELIMINARY

6. PRECAUTIONS.....	24
6.1 MEANING OF CAUTION SIGNS.....	24
6.2 CAUTIONS.....	24
6.3 ATTENTIONS.....	24
6.3.1 Handling of the product.....	24
6.3.2 Environment	25
6.3.3 Characteristics	25
6.3.4 Other.....	25
7. OUTLINE DRAWINGS	26
7.1 FRONT VIEW	26
7.2 REAR VIEW.....	27
REVISION HISTORY	28

1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

NL12876AC39-01 module is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight unit.

The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. PC, signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

1.2 APPLICATIONS

- Multimedia monitor

1.3 FEATURES


- High luminance
- Ultra wide viewing angles (Lateral electric field)
- High contrast
- High definition
- 8-bit digital RGB signals
- Single link LVDS interface
- Direct light type backlight **Note1**
- Replaceable inverter

Note1: Backlight is not replaceable by customers.

2. GENERAL SPECIFICATIONS

Display area	501.12 (W) × 300.672 (H) mm (typ.)		
Diagonal size of display	58.4 cm (23.0 inches)		
Drive system	a-Si TFT active matrix		
Display color	16,777,216 colors		
Pixel	1,280 (H) × 768 (V) pixels		
Pixel arrangement	RGB (Red dot, Green dot, Blue dot) vertical stripe		
Dot pitch	0.1305 (W) × 0.3915 (H) mm		
Pixel pitch	0.3915 (W) × 0.3915 (H) mm		
Module size	528.0 (W) × 326.0 (H) × 30.1 (D) mm (typ.)		
Weight	2,400 g (typ.)		
Contrast ratio	350:1 (typ.)		
Viewing angle	At the contrast ratio 10:1 <ul style="list-style-type: none"> • Horizontal: Left side 85° (typ.), Right side 85° (typ.) • Vertical: Up side 85° (typ.), Down side 85° (typ.) 		
Designed viewing direction	<ul style="list-style-type: none"> • Viewing angle with optimum grayscale ($\gamma=2.2$): normal axis 		
Polarizer surface	Low reflection treatment		
Polarizer pencil-hardness	2H (min.) [by JIS K5400]		
Color gamut	At LCD panel center 72 % (typ.) [against NTSC color space]		
Response time	Ton (black 10% → white 90%) 10 ms (typ.)		
Luminance	450 cd/m ² (typ.)		
Signal system	Single link LVDS (Receiver: THC63LVD824, THine Electronics Inc.) [8-bit digital signals for data of RGB colors, Dot clock (CLK), Data enable (DE)]		
Power supply voltage	LCD panel signal processing board: 5.0V Backlight inverter: 12.0V		
Backlight	Direct light type: 12 cold cathode fluorescent lamps <table border="1" style="margin-left: 40px;"> <tr> <td>Replaceable parts</td> </tr> <tr> <td>• Inverter: type No. 230PW011</td> </tr> </table>	Replaceable parts	• Inverter: type No. 230PW011
Replaceable parts			
• Inverter: type No. 230PW011			
Power consumption	At maximum luminance and checkered flag pattern 54.3W (typ.)		

3. BLOCK DIAGRAM

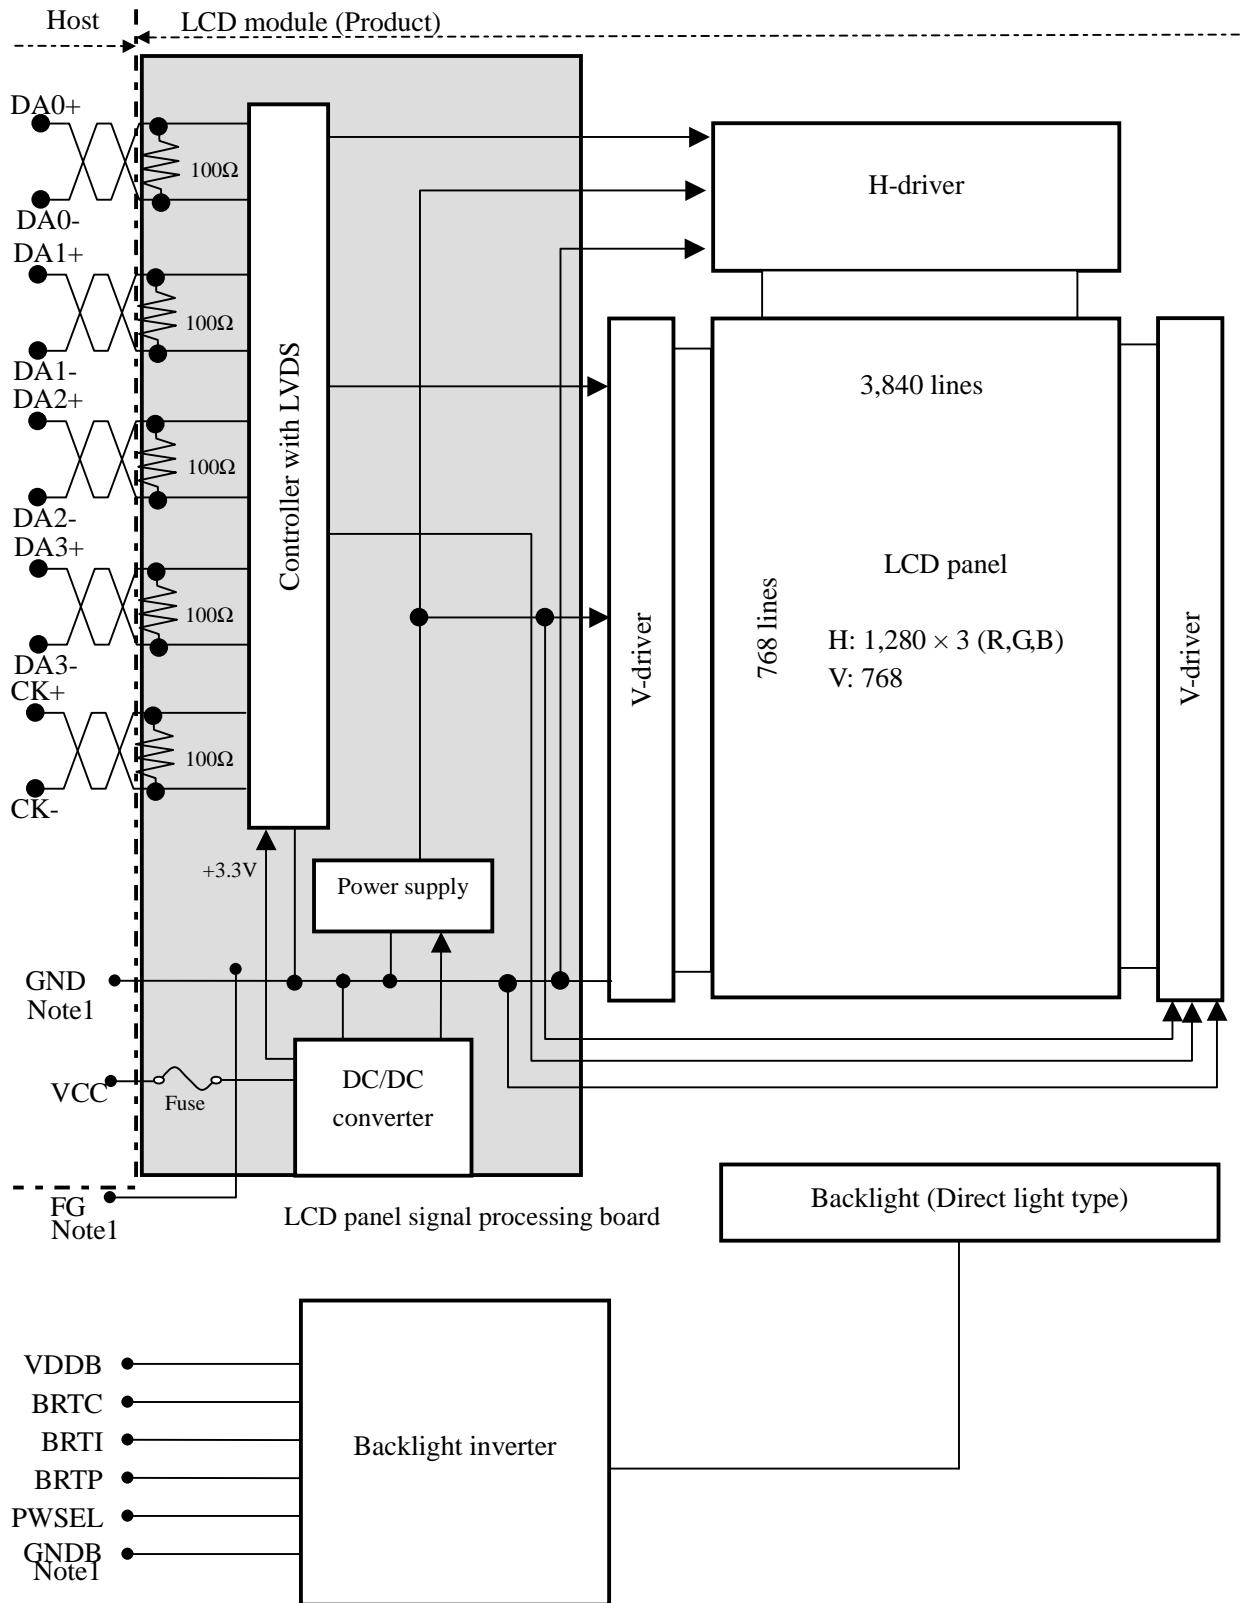

Note 1: GND is connected to FG (Frame ground). GNDB is not connected to FG.
GND and GNDB should be connected together in customer equipment.

PRELIMINARY

4. DETAILED SPECIFICATIONS

4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	528.0 ± 0.5 (W) × 326.0 ± 0.5 (H) × 30.1 ± 2.0 (D) Note1	mm
Display area	501.12 (W) × 300.672 (H) Note1	mm
Weight	2,400 (typ.), 2,600 (max.)	g

Note1: See "7.OUTLINE DRAWINGS".

4.2 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Rating	Unit	Remarks
Power supply voltage	LCD panel signal board	VCC	-0.3 to +6.0	V	Ta = 25°C
	Backlight inverter	VDDDB	-0.3 to +14	V	
Input voltage for signals	Display signals Note1	VD	-0.3 to 3.4	V	Ta = 25°C VDDDB = 12.0V
	BRTI signal	VBI	-0.3 to +1.5	V	
	BRTP signal	VBP	-0.3 to +5.5	V	
	BRTC signal	VBC	-0.3 to +5.5	V	
	PWSEL signal	VBS	-0.3 to +5.5	V	
Storage temperature		Tst	-20 to +60	°C	
Operating temperature	Front surface	TopF	0 to +55	°C	-
	Rear surface	TopR	0 to +66	°C	
Relative humidity Note2		RH	≤ 95	%	Ta ≤ 40°C
			≤ 85	%	40 < Ta ≤ 50°C
			≤ 70	%	50 < Ta ≤ 55°C
Absolute humidity Note2		AH	≤ 73 Note3	g/m ³	Ta > 55°C

Note1: Display signals are DA0+/-, DA1+/-, DA2+/-, DA3+/- and CK+/- . Also controller with LVDS receiver are worked by +3.3V from DC/DC converter.

Note2: No condensation

Note3: Ta = 55°C, RH = 70%

PRELIMINARY

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 Driving for LCD panel signal processing board

(Ta = 25°C)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks	
Power supply voltage	VCC	4.7	5.0	5.3	V	-	
Power supply current	ICC	-	540 Note1	900 Note2	mA	VCC = 5.0V	
Input voltage for LVDS receiver	Low	VDRL	0	-	0.8	V	-
	High	VDRH	2.0	-	2.4	V	
Differential input threshold voltage for LVDS receiver	Low	VTL	-100	-	-	mV	VOC=1.2V Note3
	High	VTH	-	-	+100	mV	

Note1: Checkered flag pattern (by EIAJ ED-2522)

Note2: Pattern for maximum current

Note3: Common mode voltage for LVDS receiver

4.3.2 Driving for backlight inverter

(Ta = 25°C)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks	
Power supply voltage	VDDB	11.4	12.0	12.6	V	-	
Power supply current	IDDB	-	4,300	5,000	mA	at maximum luminance, VDDB = 12.0V Note1	
Input voltage for control system signals	BRTI signal		VBI	0	-	1.0	V
	BRTP signal	Low	VBPL	0	-	0.8	V
		High	VBPH	2.0	-	5.0	V
	BRTC signal	Low	VBCL	0	-	0.8	V
		High	VBCH	2.0	-	5.0	V
	PWSEL signal	Low	VBSL	0	-	0.8	V
High		VBSH	2.0	-	5.0	V	
Input current for control system signals	BRTI signal		IBI	-130	-	-	μA
	BRTP signal	Low	IBPL	-1580	-	-	μA
		High	IBPH	-	-	3500	μA
	BRTC signal	Low	IBCL	-610	-	-	μA
		High	IBCH	-	-	440	μA
	PWSEL signal	Low	IBSL	-610	-	-	μA
High		IBSH	-	-	440	μA	

Note1: The power supply lines (VDDB and GNDB) occurs large ripple voltage (See "4.3.3 Power supply voltage ripple".) while luminance control. There is the possibility that the ripple voltage produces acoustic noise and signal wave noise in audio circuit and so on. Put a capacitor (5,000 to 6,000μF) between the power source lines (VDDB and GNDB) to reduce the noise, if the noise occurred in the circuit.

PRELIMINARY

4.3.3 Power supply voltage ripple

This product works, even if the ripple voltage levels are beyond the permissible values as following the table, but there might be noise on the display image.

Parameter	Power supply voltage	Ripple voltage (Measure at input terminal of power supply)	Note1	Unit
VCC	5.0 V	≤ 100		mVp-p
VDDDB	12.0 V	≤ 200		mVp-p

Note1: The permissible ripple voltage includes spike noise.


4.3.4 Fuse

Parameter	Fuse		Rating	Fusing current	Remarks
	Type	Supplier			
VCC	ICP-S2.3	Rohm Co., Ltd.	2.3A	4.6A	Note1
			50V		
VDDDB	R451010	Littelfuse Inc.	10A	20A	Note1
			125V		

Note1: The power supply capacity should be more than the fusing current. If the power capacity is less than the fusing current, the fuse may not blow for a short time, and then nasty smell, smoking and so on may occur.

4.4 POWER SUPPLY VOLTAGE SEQUENCE

4.4.1 Sequence for LCD panel signal processing board

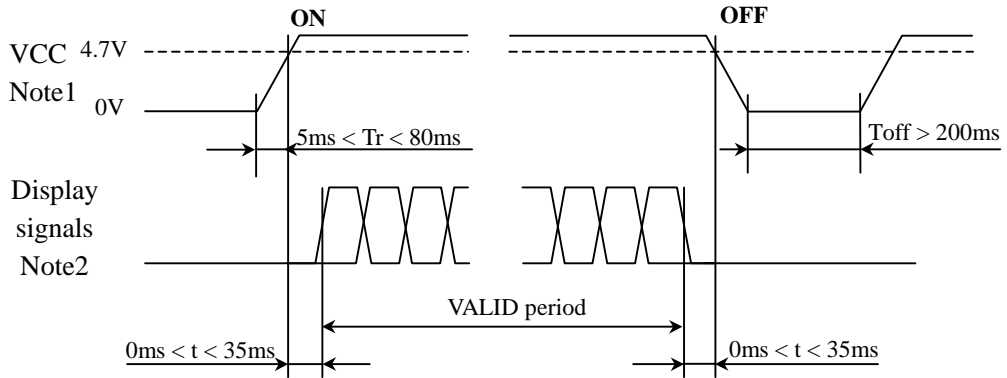


Note1: In terms of voltage variation (voltage drop) while VCC rising edge is below 4.7V, a protection circuit may work, and then this product may not work.

Note2: Display signals (DA0+/-, DA1+/-, DA2+/-, DA3+/- and CK+/-) with 100Ω (Characteristic impedance) must be Low or High-impedance, exclude the VALID period (See above sequence diagram), in order to avoid that internal circuits is damaged.

If some of display signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If customer stops the display signals, they should be cut VCC.

4.4.2 Sequence for backlight inverter

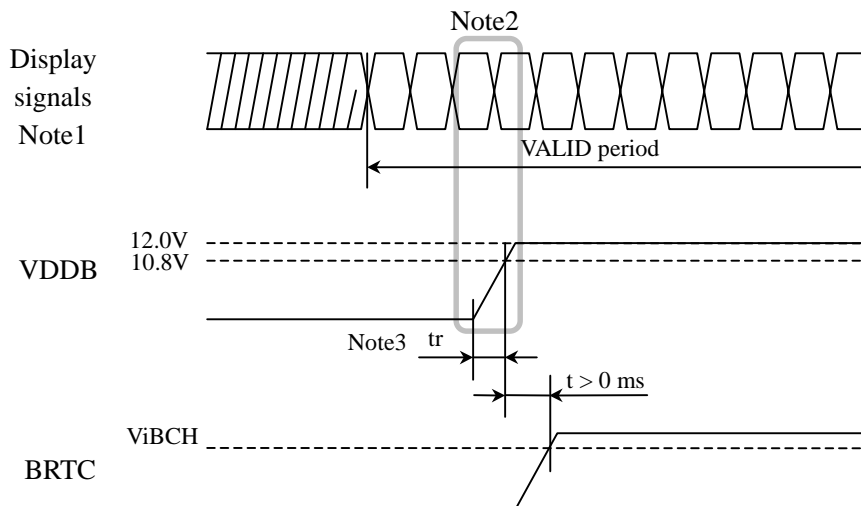

Note1: These are the display signals for LCD panel signal processing board.

Note2: The backlight power voltage (VDDb) should be inputted within the valid period of display signals, in order to avoid unstable data display.

Note3: The t_r should be less than 800ms when BRTC terminal [Socket: CN202, Pin No.: 4] (See "4.5.2 Backlight inverter".) is Open.

4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS

4.5.1 LCD panel signal processing board

CN1 socket (Module side): FI-SEB20P-HF (Japan Aviation Electronics Industry Limited)

Adaptable plug: FI-SE20M / FI-S20S (Japan Aviation Electronics Industry Limited)

Pin No.	Symbol	Function	Remarks
1	VCC	Power supply	-
2	VCC		
3	GND	Ground	-
4	GND		
5	D0-	Pixel data	Note1
6	D0+		
7	GND	Ground	-
8	D1-	Pixel data	Note1
9	D1+		
10	GND	Ground	-
11	D2-	Pixel data	Note1
12	D2+		
13	GND	Ground	-
14	CK-	Pixel clock	Note1
15	CK+		
16	GND	Ground	-
17	D3-	Pixel data	Note1
18	D3+		
19	GND	Ground	-
20	GND		

Note1: Twist pair wires with 100Ω (Characteristic impedance) should be connected between LCD panel signal processing board and LVDS transmitter.

CN1: Figure of socket

1	2	19	20
---	---	-------	----	----

PRELIMINARY


4.5.2 Backlight inverter

CN201 socket: DF3-10P-2H (Hirose Electric Co., Ltd.)

Adaptable plug: DF3-10S-2C (Hirose Electric Co., Ltd.)

Pin No.	Symbol	Function	Remarks
1	GNDB	Backlight ground	-
2	GNDB	Backlight ground	
3	GNDB	Backlight ground	
4	GNDB	Backlight ground	
5	GNDB	Backlight ground	
6	VDDDB	Power supply	
7	VDDDB	Power supply	
8	VDDDB	Power supply	
9	VDDDB	Power supply	
10	VDDDB	Power supply	

CN201: Figure of socket




CN202 socket: IL-Z-9PL1-SMTY (Japan Aviation Electronics Industry Limited)

Adaptable plug: IL-Z-9S-S125C3 (Japan Aviation Electronics Industry Limited)


Pin No.	Symbol	Function	Remarks
1	GNDB	Backlight ground	-
2	GNDB	Backlight ground	
3	N.C.	Non-connection	
4	BRTC	Backlight ON/OFF signal	ON: High or Open, OFF: Low
5	GNDB	Backlight ground	-
6	BRTI	Luminance control by resistor method or voltage method	Note1
7	B RTP	PWM signal	
8	GNDB	Backlight ground	-
9	PWSEL	Select of luminance control signal method	Note1

Note1: See "4.6.1 Luminance control methods".


CN202: Figure of socket



4.5.3 Positions of sockets

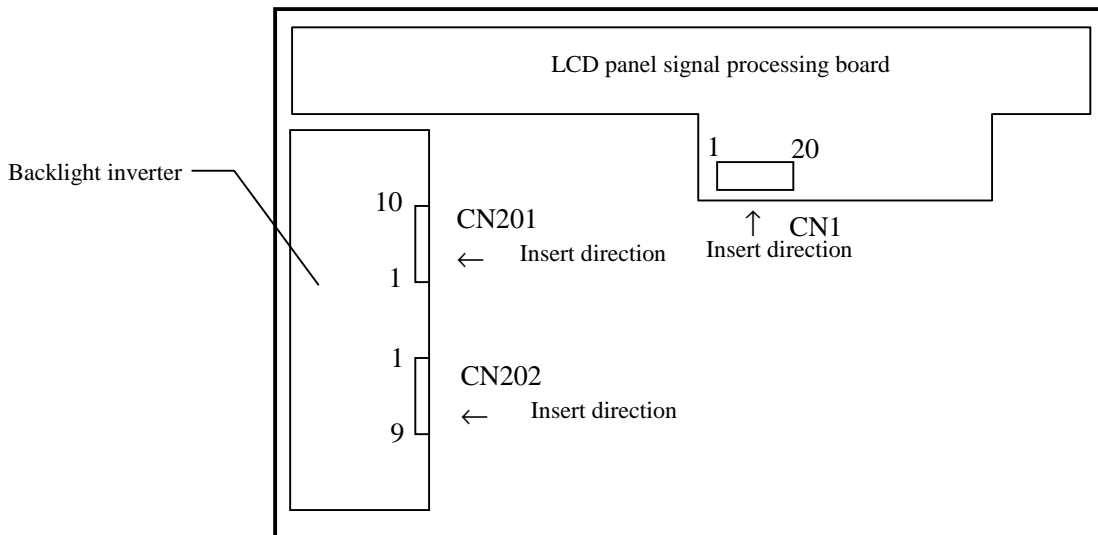

4.5.4 Connection between receiver and transmitter for LVDS

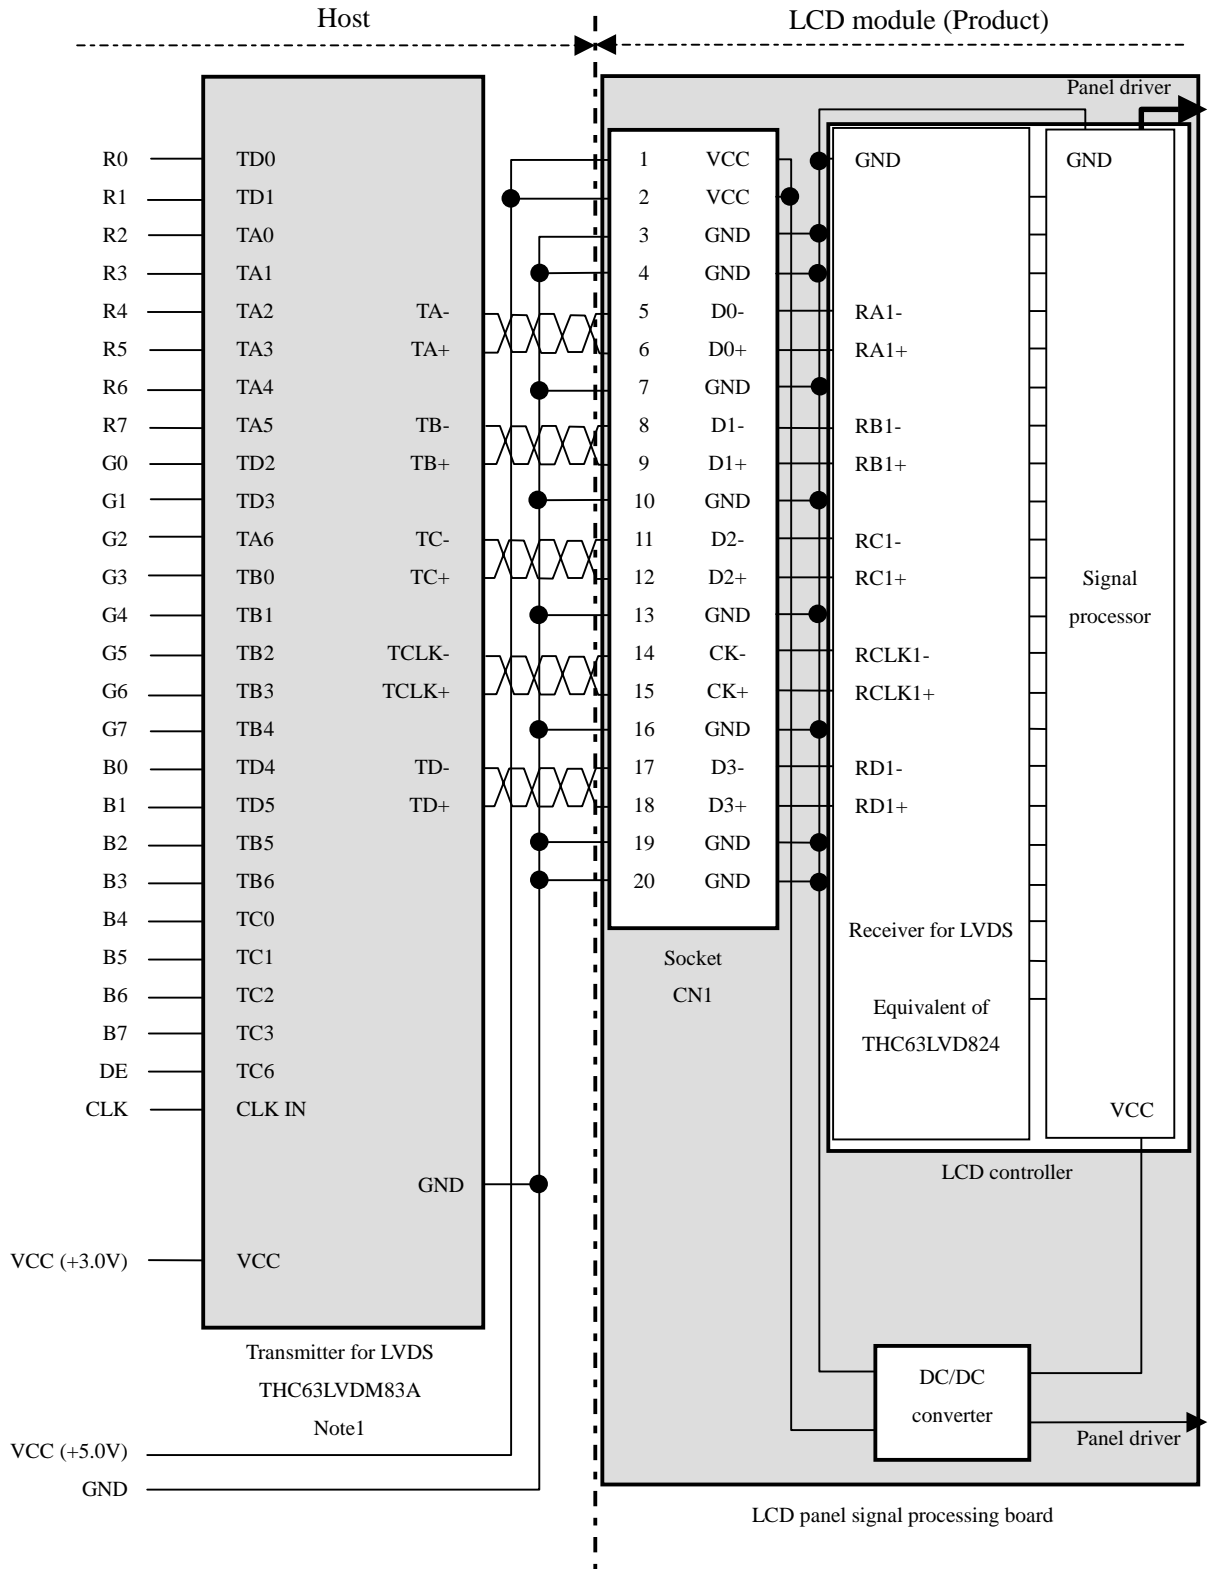


Note1: Recommended transmitter

See the data sheet for THC63LVDM83A (THine Electronics Inc.).

4.6 LUMINANCE CONTROLS

4.6.1 Luminance control methods

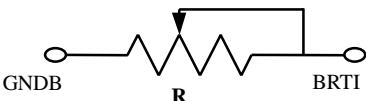Method	Adjustment and luminance ratio	PWSEL signal	BRTP signal						
Resistor control Note1	<ul style="list-style-type: none"> • Adjustment The variable resistor (R) for luminance control should be 10kΩ ±5%, B curve, 1/10W. Minimum point of the resistor is the minimum luminance. Also maximum point of the resistor is the maximum luminance.  <ul style="list-style-type: none"> • Luminance ratio Note3 <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Resistance</th> <th>Luminance ratio</th> </tr> </thead> <tbody> <tr> <td>0 kΩ</td> <td>20% (Minimum)</td> </tr> <tr> <td>10 kΩ</td> <td>100% (Maximum)</td> </tr> </tbody> </table>	Resistance	Luminance ratio	0 kΩ	20% (Minimum)	10 kΩ	100% (Maximum)	High or Open	Open
Resistance	Luminance ratio								
0 kΩ	20% (Minimum)								
10 kΩ	100% (Maximum)								
Voltage control Note1	<ul style="list-style-type: none"> • Adjustment This control method can carry out continuation adjustment of luminance, if it is adjusted within the rated voltage for BRTI signal (VBI). <ul style="list-style-type: none"> • Luminance ratio Note3 <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>BRTI Voltage (VBI)</th> <th>Luminance ratio</th> </tr> </thead> <tbody> <tr> <td>0V</td> <td>20% (Minimum)</td> </tr> <tr> <td>1.0V</td> <td>100% (Maximum)</td> </tr> </tbody> </table>	BRTI Voltage (VBI)	Luminance ratio	0V	20% (Minimum)	1.0V	100% (Maximum)		
BRTI Voltage (VBI)	Luminance ratio								
0V	20% (Minimum)								
1.0V	100% (Maximum)								
Pulse width modulation Note1 Note2	<ul style="list-style-type: none"> • Adjustment Pulse width modulation (PWM) method works, when PWSEL signal is Low and PWM signal (BRTP signal) is inputted into BRTP terminal. The luminance is controlled by duty ratio of BRTP signal. <ul style="list-style-type: none"> • Luminance ratio Note3 <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Duty ratio Note4</th> <th>Luminance ratio</th> </tr> </thead> <tbody> <tr> <td>0.2</td> <td>20% (Minimum)</td> </tr> <tr> <td>1.0</td> <td>100% (Maximum)</td> </tr> </tbody> </table>	Duty ratio Note4	Luminance ratio	0.2	20% (Minimum)	1.0	100% (Maximum)	Low	PWM signal
Duty ratio Note4	Luminance ratio								
0.2	20% (Minimum)								
1.0	100% (Maximum)								

Note1: In case of the resistor control method and the voltage control method, noises may appear on the display image depending on the input signals timing for LCD panel signal processing board.

Use PWM method, if interference noises appear on the display image!

Note2: In case BRTC signal is High or Open, the inverter will stop work when BRTP signal is fixed to Low. In this case, backlight will not turn on, even if BRTP signal is inputted again. This is not out of order. Backlight inverter will start to work when power is supplied again.


Note3: These data are the target values.

Note4: See "4.6.2 Detail of PWM timing".


4.6.2 Detail of PWM timing

(1) Timing diagrams

• Outline chart

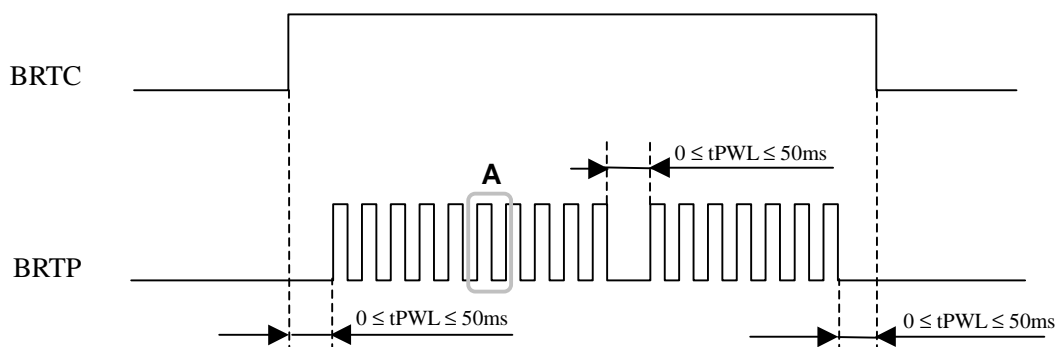

• Detail of A part

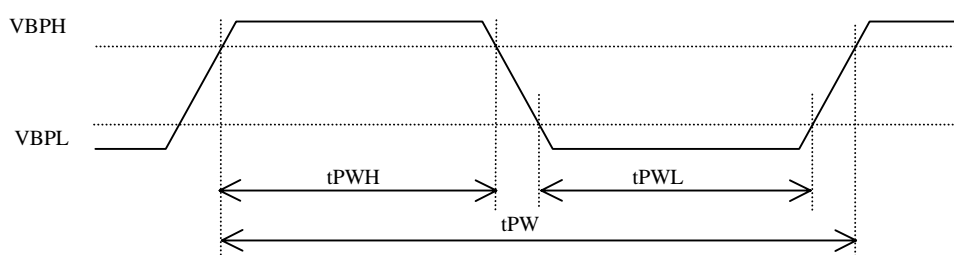

(2) Each parameter

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Luminance control frequency	FL	230	255	280	Hz	Note1, Note2
Duty ratio	DL	0.2	-	1.0	-	Note1, Note3
Non signal period	tPWL	0	-	50	ms	Note4

Note1: Definition of parameters is as follows.

$$FL = \frac{1}{t_{PW}}, DL = \frac{t_{PWH}}{t_{PW}}$$

Note2: See the following formula for luminance control frequency.

$$\text{Luminance control frequency} = tv \times (n+0.25) \text{ [or } (n + 0.75)]$$

$$n = 1, 2, 3 \dots \dots$$

tv: See "4.10.4 Timing characteristics".

The interference noise of luminance control frequency and input signal frequency for LCD panel signal processing board may appear on a display. Set up luminance control frequency so that the interference noise does not appear!

Note3: See "4.6.1 Luminance control methods".

Note4: If tPWL is more than 50ms, the backlight will be turned off by a protection circuit for inverter.

PRELIMINARY

4.7 DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display in equivalent to 16,777,216 colors in 256 scale. Also the relation between display colors and input data signals is as the following table.

Display colors		Data signal (0: Low level, 1: High level)																							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑					:								:							:				
	↓					:								:							:				
	bright	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	↑					:								:							:				
	↓					:								:							:				
	bright	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	↑					:								:							:				
	↓					:								:							:				
	bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

PRELIMINARY


4.8 DISPLAY POSITIONS

The following table is the coordinates per pixel (See figure of "4.9 SCANNING DIRECTIONS").

C(0, 0)	C(1, 0)	...	C(X, 0)	...	C(1278, 0)	C(1279, 0)
C(0, 1)	C(1, 1)	...	C(X, 1)	...	C(1278, 1)	C(1279, 1)
• • •	• • •	• •• •	• • •	• •• •	• • •	• •• •
C(0, Y)	C(1, Y)	...	C(X, Y)	...	C(1278, Y)	C(1279, Y)
• • •	• • •	• •• •	• • •	• •• •	• • •	• • •
C(0,766)	C(1,766)	...	C(X,766)	...	C(1278,766)	C(1279,766)
C(0,767)	C(1,767)	...	C(X,767)	...	C(1278,767)	C(1279,767)

4.9 SCANNING DIRECTIONS

The following figures are seen from a front view. Also the arrow shows the direction of scan.

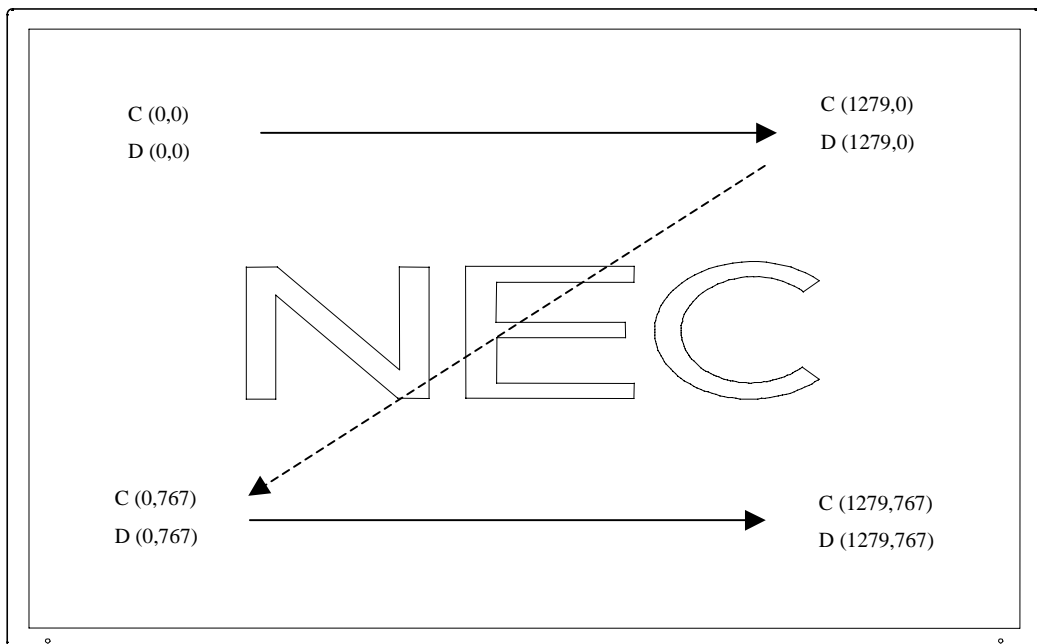

Note1

Note1: Meaning of C (X, Y) and D (X, Y)


C (X, Y): The coordinates of the display position (See "4.8 DISPLAY POSITIONS".)

D (X, Y): The data number of input signal for LCD panel signal processing board

4.10 INPUT SIGNAL TIMINGS FOR LCD PANEL SIGNAL PROCESSING BOARD


4.10.1 Outline of input signal timings

- Horizontal signal

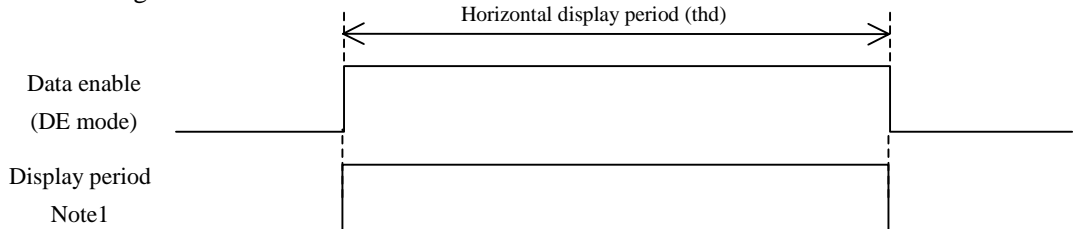

Note1: This diagram indicates virtual signal for set up to timing.

- Vertical signal

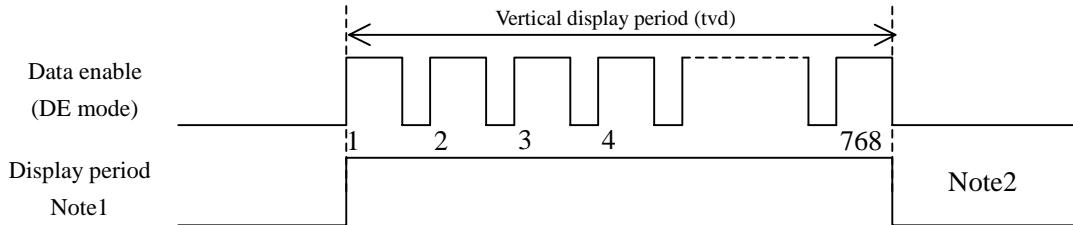


Note1: This diagram indicates virtual signal for set up to timing.

Note2: See "4.10.2 Detailed input signal timing chart for DE mode" for numeration of pulse.

4.10.2 Detailed input signal timing chart for DE mode


- Outline chart

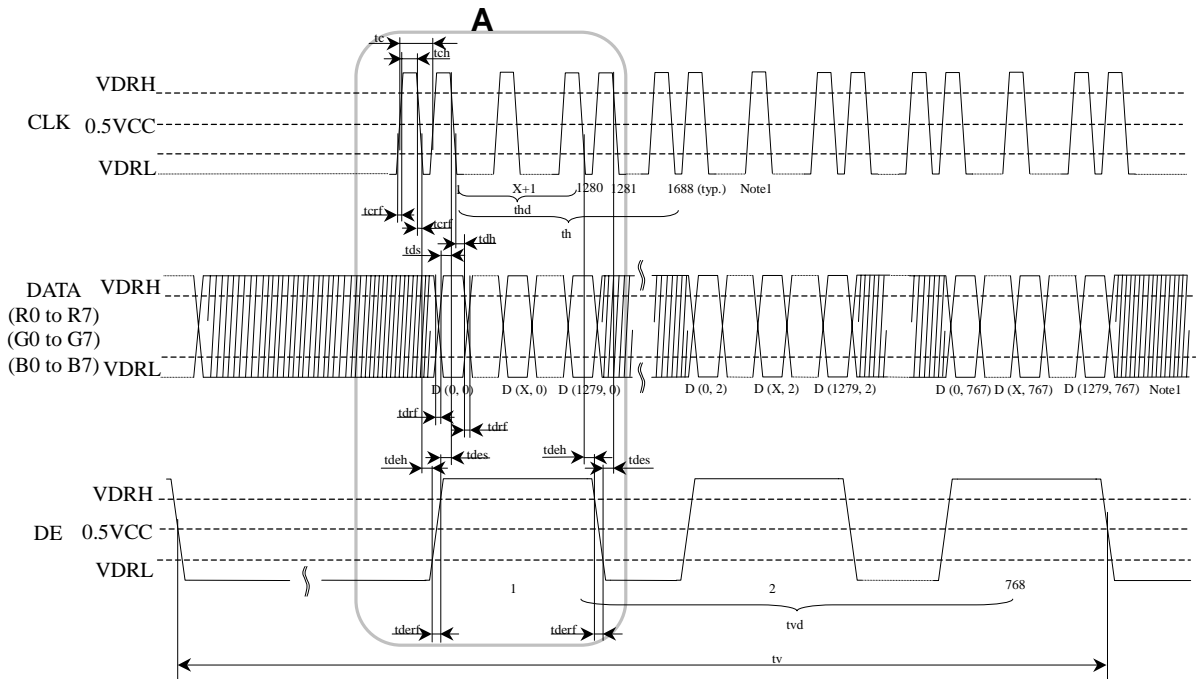

Note1: X is data number from 1 to 1278. See "4.9 SCANNING DIRECTIONS".

PRELIMINARY

• Detail of A part

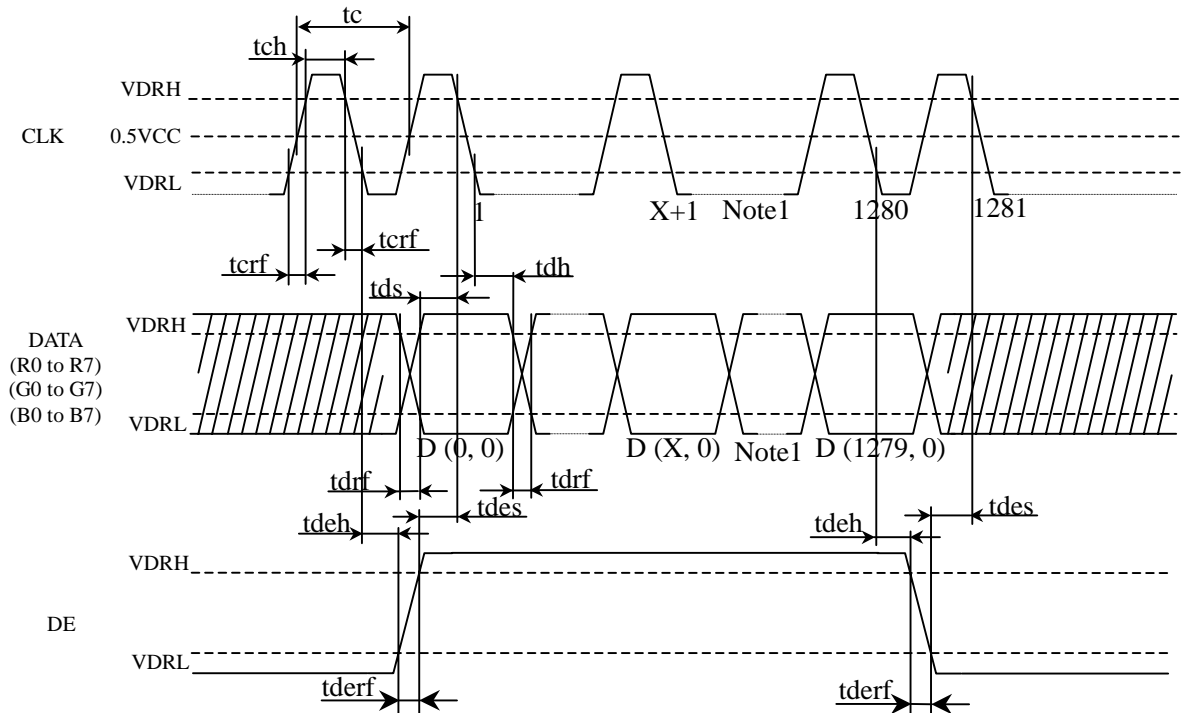

Note1: X is data number from 1 to 1278. See "4.9 SCANNING DIRECTIONS".

4.10.3 Timing characteristics

	Parameter	Note1	Symbol	min.	typ.	max.	Unit	Remarks
CLK	Frequency (LVDS receiver)		tcf	78.0	81.0	84.0	MHz	12.3 ns (typ.) Note1
	Duty		tcd	-	-	-	-	Note1, Note2
	Rise time, Fall time		tcrf	-	-	-	-	
DATA	CLK-DATA	Setup time	tds	-	-	-	-	Note2
		Hold time	tdh	-	-	-	-	
	Rise time, Fall time		tdrf	-	-	-	-	
DE	Horizontal	Cycle	th	16.3	20.839	-	μ s	CLK=81MHz (typ.) Note1, Note3
		Display period	thd	1,320	1,688	2,000	CLK	
	Vertical (One frame)	Cycle	tv	13.1	16.666	20.0	ms	Note1
		Display period	tvd	772	806	-	H	
	CLK-DE	Setup time	tdes	-	-	-	-	Note2
		Hold time	tdeh	-	-	-	-	
Rise time, Fall time		tderf	-	-	-	-		

Note1: Definition of parameters is as follows.

$$t_{cf} = 1/t_c, t_{cd} = t_{ch}/t_c = t_{ch} \times t_{cf}, t_c = 1\text{CLK}, t_h = 1\text{H}$$

Note2: See the data sheet of LVDS transmitter.

Note3: "th" must keep the fluctuation within ± 1 CLK, because of avoidance of image sticking.

4.11 OPTICS


4.11.1 Optical characteristics

Parameter	Note1	Condition	Symbol	min.	typ.	max.	Unit	Remarks
Contrast ratio		White/Black at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	CR	200	350	-	-	Note2
Luminance		White at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	L	350	450	-	cd/m ²	-
Luminance uniformity		-	LU	-	1.20	1.30	-	Note3
Chromaticity	White	x coordinate	Wx	-	0.300	-	-	Note4
		y coordinate	Wy	-	0.315	-	-	
	Red	x coordinate	Rx	-	0.64	-	-	
		y coordinate	Ry	-	0.34	-	-	
	Green	x coordinate	Gx	-	0.29	-	-	
		y coordinate	Gy	-	0.61	-	-	
	Blue	x coordinate	Bx	-	0.14	-	-	
		y coordinate	By	-	0.08	-	-	
Color gamut		$\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$ at center, against NTSC color space	C	65	72	-	%	
Response time		Black to white	Ton	-	10	15	ms	Note5 Note6
		White to black	Toff	-	13	20	ms	
Viewing angle	Right	$\theta_U = 0^\circ, \theta_D = 0^\circ, CR = 10$	θ_R	-	85	-	°	Note7
	Left	$\theta_U = 0^\circ, \theta_D = 0^\circ, CR = 10$	θ_L	-	85	-	°	
	Up	$\theta_R = 0^\circ, \theta_L = 0^\circ, CR = 10$	θ_U	-	85	-	°	
	Down	$\theta_R = 0^\circ, \theta_L = 0^\circ, CR = 10$	θ_D	-	85	-	°	

Note1: Measurement conditions are as follows.

$T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{V}, V_{DDB} = 12.0\text{V}$

Optical characteristics are measured at luminance saturation after 20minutes from working the product, in the dark room. Also measurement method for luminance is as follows.

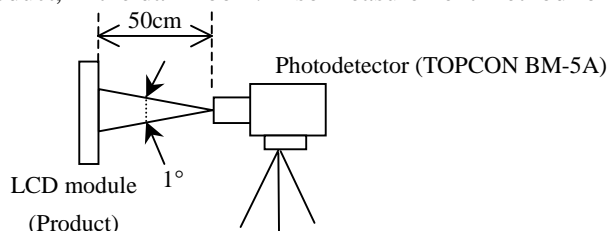

Note2: See "4.11.2 Definition of contrast ratio".

Note3: See "4.11.3 Definition of luminance uniformity".

Note4: These coordinates are found on CIE 1931 chromaticity diagram.

Note5: Product surface temperature: $T_{opF} = 25^\circ\text{C}$

Note6: See "4.11.4 Definition of response times".

Note7: See "4.11.5 Definition of viewing angles".

4.11.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

4.11.3 Definition of luminance uniformity

The luminance uniformity is calculated by using following formula.


$$\text{Luminance uniformity (LU)} = \frac{\text{Maximum luminance from ① to ⑤}}{\text{Minimum luminance from ① to ⑤}}$$

The luminance is measured at near the 5 points shown below.

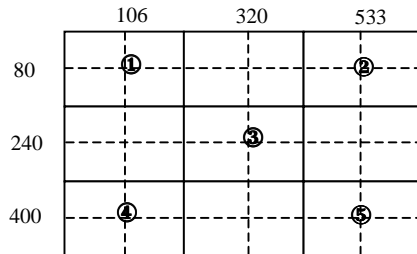


4.11.4 Definition of response times

Response time is measured, the luminance changes from "black" to "white", or "white" to "black" on the same screen point, by photo-detector. Ton is the time it takes the luminance change from 10% up to 90%. Also Toff is the time it takes the luminance change from 90% down to 10% (See the following diagram.).

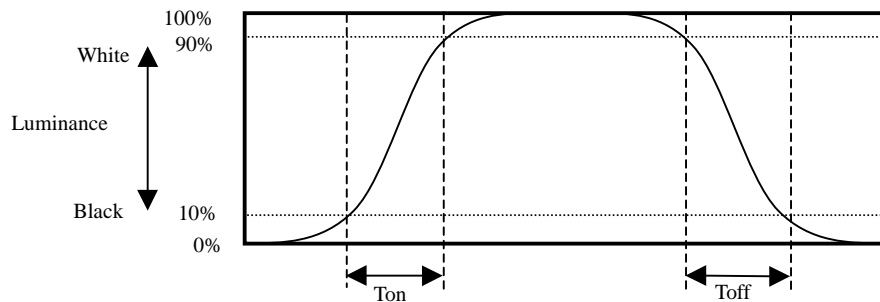

4.11.5 Definition of viewing angles

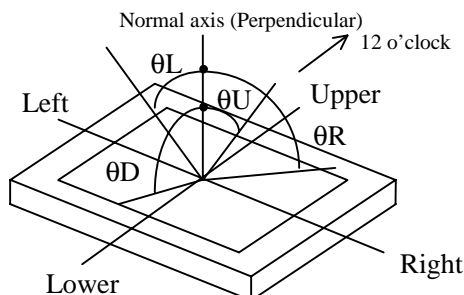


5. RELIABILITY TESTS

Test item	Condition	Judgment
High temperature and humidity (Operation)	① $60 \pm 2^\circ\text{C}$, RH = 60%, 240hours ② Display data is black.	No display malfunctions Note1
Heat cycle (Operation)	① $0 \pm 3^\circ\text{C}$...1hour $55 \pm 3^\circ\text{C}$...1hour ② 50cycles, 4hours/cycle ③ Display data is black.	
Thermal shock (Non operation)	① $-20 \pm 3^\circ\text{C}$...30minutes $60 \pm 3^\circ\text{C}$...30minutes ② 100cycles, 30minutes/cycle ③ Temperature transition time is within 5 minutes.	
ESD (Operation)	① 150pF, 150Ω, ±10kV ② 9 places on a panel surface Note2 ③ 10 times each places at 1 sec interval	
Dust (Operation)	① Sample dust: No. 15 (by JIS-Z8901) ② 15 seconds stir ③ 8 times repeat at 1 hour interval	
Vibration (Non operation)	① 5 to 100Hz, 11.76m/s^2 ② 1 minute/cycle ③ X, Y, Z direction ④ 10 times each directions	No display malfunctions Note1 No physical damages
Mechanical shock (Non operation)	① 294m/s^2 , 11ms ② ±X, ±Y, ±Z direction ③ 3 times each directions	

Note1: Display and appearance are checked under environmental conditions equivalent to the inspection conditions of defect criteria. 8

Note2: See the following figure for discharge points.

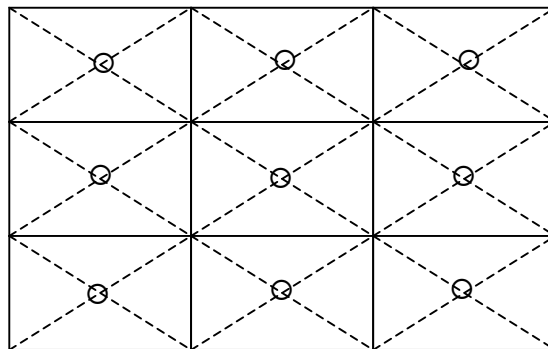

6. PRECAUTIONS

6.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "6.2 CAUTIONS" and "6.3 ATTENTIONS", after understanding this contents!**

	This sign has the meaning that customer will be injured by himself or the product will sustain a damage, if customer has wrong operations.
	This sign has the meaning that customer will get an electrical shock, if customer has wrong operations.
	This sign has the meaning that customer will be injured by himself, if customer has wrong operations.

6.2 CAUTIONS

	* Do not touch the working backlight and inverter. Customer will be in danger of an electric shock.
	<p>* Do not touch the working backlight and inverter. Customer will be in danger of burn injury.</p> <p>* Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass. (Shock: To be not greater 294m/s² and to be not greater 11ms, Pressure: To be not greater 19.6 N)</p>

6.3 ATTENTIONS



6.3.1 Handling of the product

- ① Take hold of both ends without touch the circuit board cover when customer pulls out products (LCD modules) from inner packing box. If customer touches it, products may be broken down or out of adjustment, because of stress to mounting parts.
- ② Do not hook cables nor pull connection cables such as lamp cable and so on, for fear of damage.
- ③ If customer puts down the product temporarily, the product puts on flat subsoil as a display side turns down.
- ④ Take the measures of electrostatic discharge such as earth band, ionic shower and so on, when customer deals with the product, because products may be damaged by electrostatic.
- ⑤ The torque for mounting screws must never exceed 0.39N·m. Higher torque values might result in distortion of the bezel.
- ⑥ The product must be installed using mounting holes without undue stress such as bends or twist (See outline drawings). And do not add undue stress to any portion (such as bezel flat area) except mounting hole portion.
Bends or twist described above and undue stress to any portion except mounting hole portion may cause display un-uniformity.

- ⑦ Do not press or rub on the sensitive display surface. If customer clean on the panel surface, NEC recommends using the cloth with ethanolic liquid such as screen cleaner for LCD.
- ⑧ Do not push-pull the interface connectors while the product is working, because wrong power sequence may break down the product.
- ⑨ Do not bend or unbend the lamp cable at the near part of the lamp holding rubber, to avoid the damage for high voltage side of the lamp. This damage may cause a lamp breaking and abnormal operation of high voltage circuit.

6.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in antistatic pouch in room temperature, because of avoidance for dusts and sunlight, if customer stores the product.
- ② In order to prevent dew condensation occurring by temperature difference, the product packing box must be opened after leave under the environment of an unpacking room temperature enough. Because a situation of dew condensation occurring is changed by the environmental temperature and humidity, evaluate the leaving time sufficiently. (Recommendation leaving time: 6 hour or more with packing state)
- ③ Do not operate in high magnetic field. Circuit boards may be broken down by it.
- ④ This product is not designed as radiation hardened.
- ⑤ Use an original protection sheet on the product surface (polarizer). Adhesive type protection sheet should be avoided, because it may change color or properties of the polarizer.

6.3.3 Characteristics

The following items are neither defects nor failures.

- ① Response time, luminance and color may be changed by ambient temperature.
- ② The LCD may be seemed luminance non-uniformity, flicker, vertical seam or small spot by display patterns.
- ③ Optical characteristics (e.g. luminance, display uniformity, etc.) gradually is going to change depending on operating time, and especially low temperature, because the LCD has cold cathode fluorescent lamps.
- ④ Do not display the fixed pattern for a long time because it may cause image sticking. Use a screen saver, if the fixed pattern is displayed on the screen.
- ⑤ The display color may be changed by viewing angle because of the use of condenser sheet in the backlight.
- ⑥ Optical characteristics may be changed by input signal timings.
- ⑦ The interference noise of input signal frequency for this product's signal processing board and luminance control frequency of customer's backlight inverter may appear on a display. Set up luminance control frequency of backlight inverter so that the interference noise does not appear.


6.3.4 Other

- ① All GND, GNDB, VCC and VDDB terminals should be used without a non-connected line.
- ② Do not disassemble a product or adjust volume without permission of NEC.
- ③ See "REPLACEMENT MANUAL FOR INVERTER", if customer would like to replace the inverter.
- ④ Pay attention not to insert waste materials inside of products, if customer uses screw nails.
- ⑤ Pack the product with original shipping package, because of avoidance of some damages during transportation, when customer returns it to NEC for repair and so on.

PRELIMINARY

7. OUTLINE DRAWINGS




7.1 FRONT VIEW

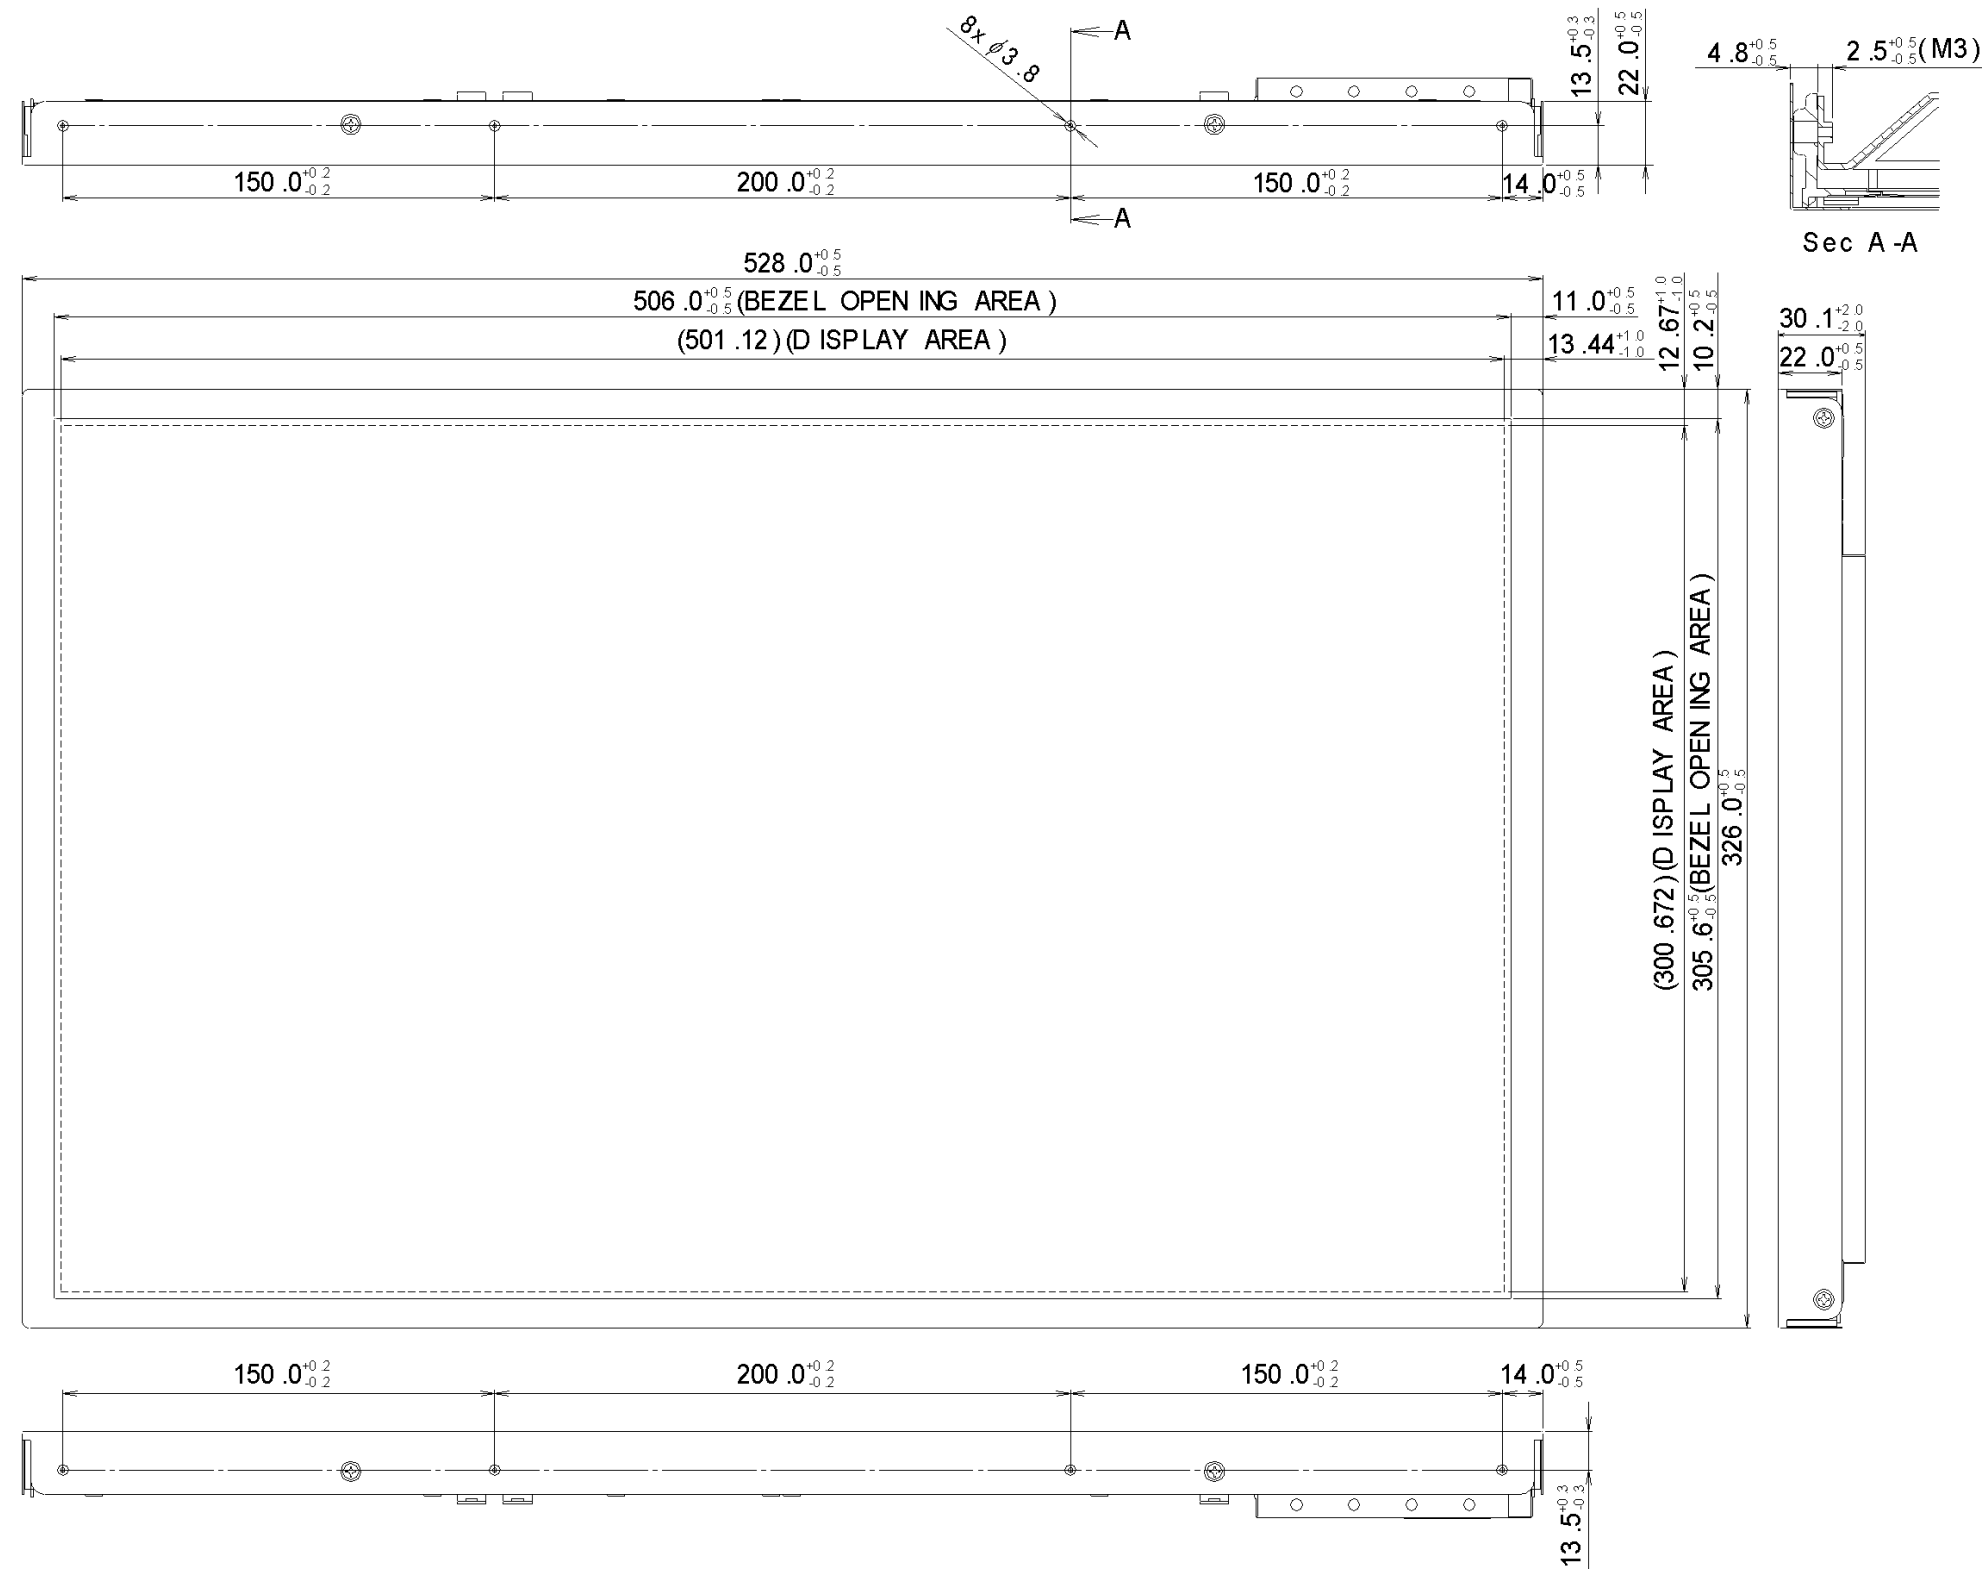

Unit: mm

PRELIMINARY

7.2 REAR VIEW

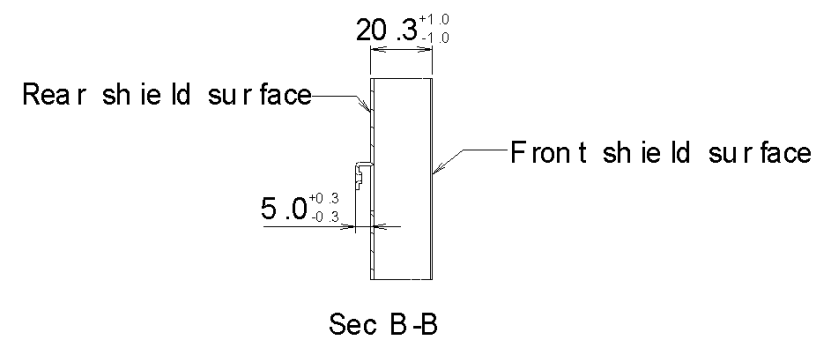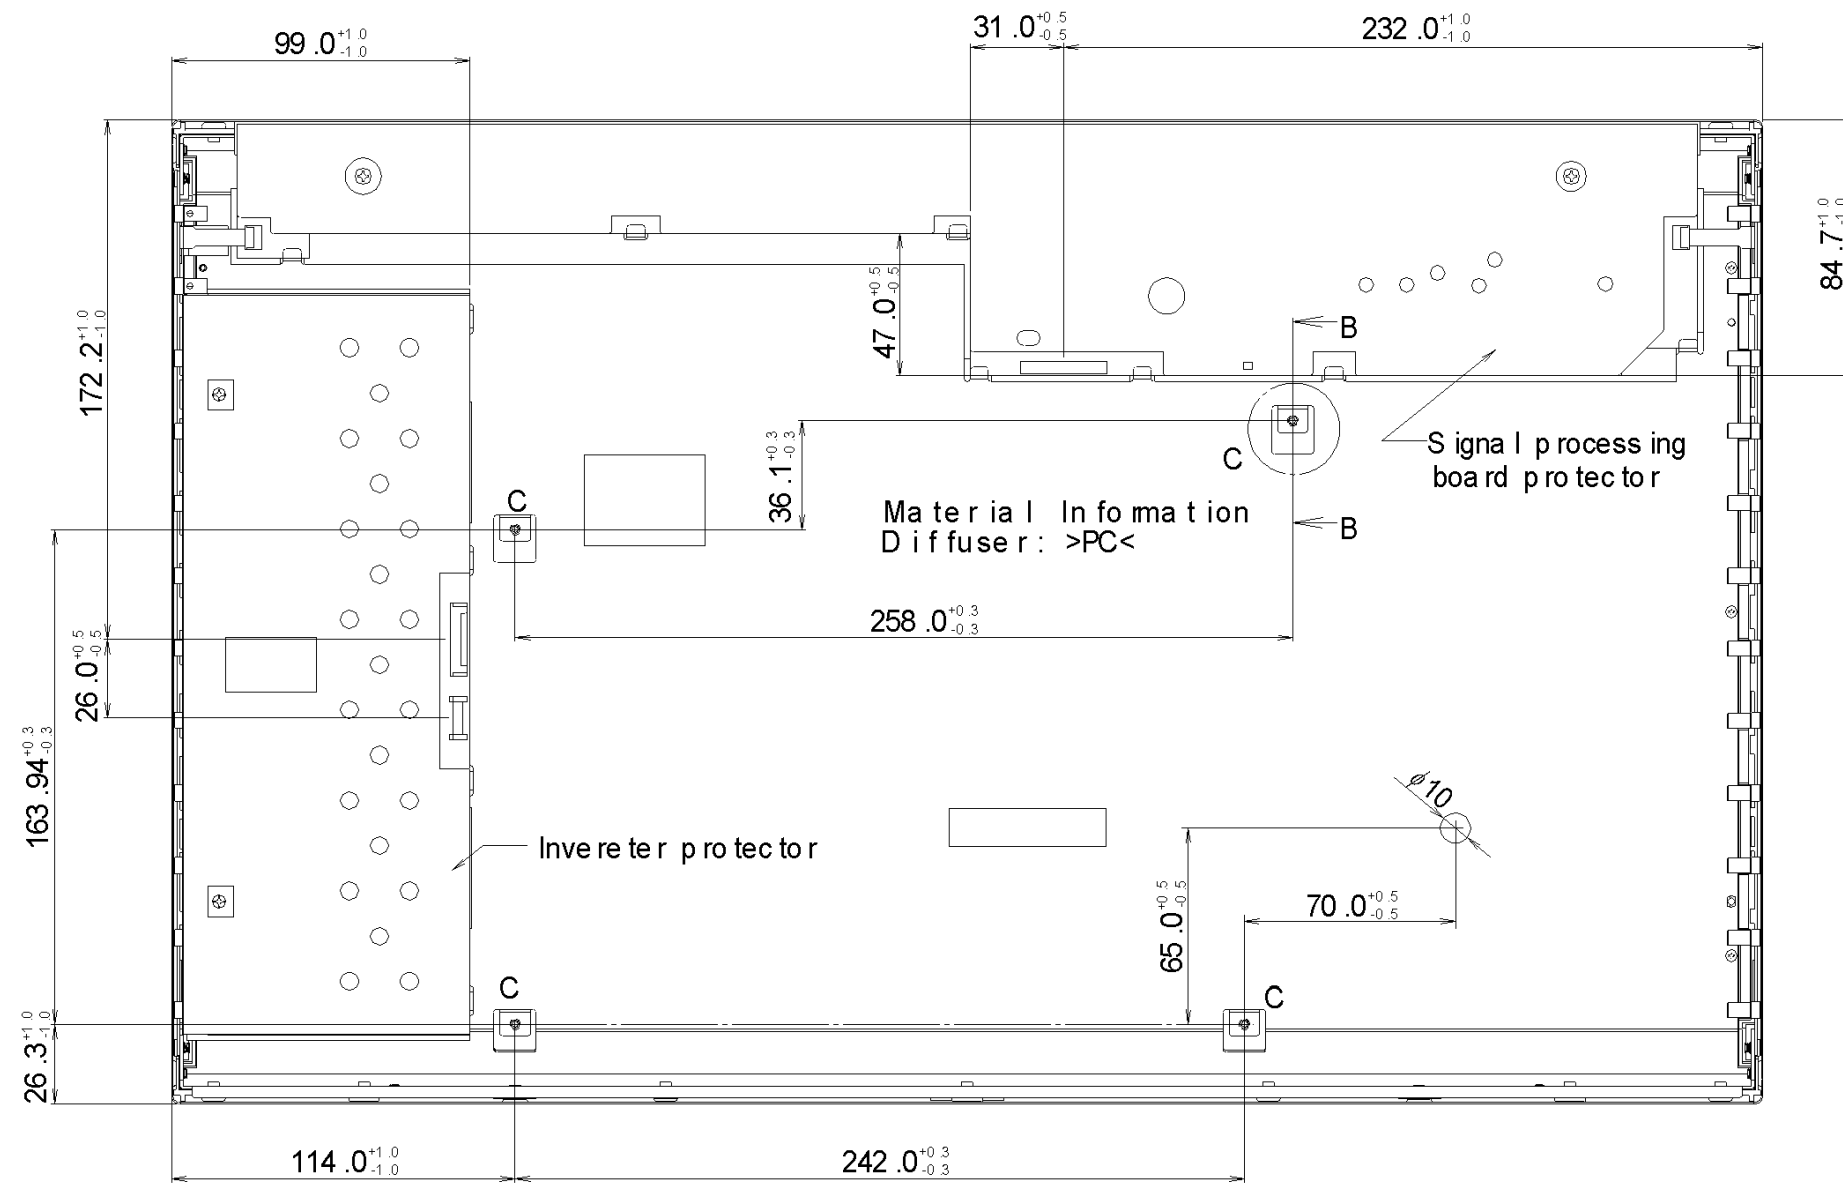

Unit: mm

PRELIMINARY

REVISION HISTORY

The inside of latest specifications is revised to the clerical error, undecided mater (TBD, etc.) and the major improvement of previous edition. Only a changed part such as functions, characteristic value and so on that may affect a design of customers, are described especially below.

Edition	Document number	Prepared date	Revision contents and signature
1st edition	DOD - M - 0290	Apr. 6, 2001	<p>Revision contents</p> <p>New issue</p> <p>Writer</p> <p>Approved by _____ Checked by _____ Prepared by _____</p> <p>A. OKAMOTO _____ A. SAWADA</p>
2nd edition	DOD - M - 0550	Jul. 30, 2001	<p>Revision contents</p> <ul style="list-style-type: none"> • Change part (Before-1st edition → After-2nd edition) <p>(1) page 6/28</p> <p>2. GENERAL SPECIFICATIONS</p> <p><i>Module size</i> 530.0 (H) × 329.0 (V) × 36.0 (D) mm (typ.)</p> <p><i>Signal system</i> 1port LVDS (Thine Electronics Inc. THC63LVDF84A)</p> <p><i>Backlight</i> Direct light type: 16 cold cathode fluorescent lamps</p> <p>→</p> <p>page 6/29</p> <p>2. GENERAL SPECIFICATIONS</p> <p><i>Module size</i> 528.0 (H) × 326.0 (V) × 33.0 (D) mm (typ.)</p> <p><i>Signal system</i> Single link LVDS (Receiver: THC63LVD824, Thine Electronics Inc.)</p> <p><i>Backlight</i> Direct light type: 12 cold cathode fluorescent lamps</p> <p>(2) page 8/28</p> <p>4.1 MECHANICAL SPECIFICATIONS</p> <p>Module size 530.0 ± 1.0 (H) × 329.0 ± 1.0 (V) × 36.0 ± 1.0 (D)</p> <p>→</p> <p>page 8/29</p> <p>4.1 MECHANICAL SPECIFICATIONS</p> <p>Module size 528.0 ± 0.5 (H) × 326.0 ± 0.5 (V) × 33.0 ± 0.5 (D)</p> <p>(3) page 9/28</p> <p>4.3.1 Driving for LCD panel signal processing board</p> <p>Supply current ICC TBD Note1 TBD Note2 mA</p> <p>→</p> <p>page 9/29</p> <p>4.3.1 Driving for LCD panel signal processing board</p> <p>Supply current ICC TBD Note1 1,000 Note2 mA</p>

PRELIMINARY

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																									
3rd edition	DOD - M - 0694	Oct. 22, 2001	<p>Revision contents</p> <ul style="list-style-type: none"> • Change part (Before-2nd edition → After-3rd edition) <p>(1) page 6/29</p> <p>2. GENERAL SPECIFICATIONS</p> <p><i>Contrast ratio</i> TBD (typ.)</p> <p><i>Polarizer surface</i> TBD</p> <p><i>Color gamut</i> 60% (typ.)</p> <p><i>Response time</i> 30 to 40 ms (typ.) Ton + Toff</p> <p><i>Backlight</i> • Backlight unit: type No. TBD</p> <p> • Inverter: type No. TBD</p> <p><i>Power consumption</i> TBD (typ.)</p> <p>→</p> <p>page 6/33</p> <p>2. GENERAL SPECIFICATIONS</p> <p><i>Contrast ratio</i> 350:1 (typ.)</p> <p><i>Polarizer surface</i> Low reflection treatment</p> <p><i>Color gamut</i> 72% (typ.)</p> <p><i>Response time</i> 12 ms (typ.)</p> <p><i>Backlight</i> • Backlight unit: type No. 230LHS01</p> <p> • Inverter: type No. 230PW011</p> <p><i>Power consumption</i> 57.4W (typ.)</p> <p>(2) page 8/29</p> <p>4.1 MECHANICAL SPECIFICATIONS</p> <p>Weight 2,600 (typ.), TBD (max.)</p> <p>→</p> <p>page 8/33</p> <p>4.1 MECHANICAL SPECIFICATIONS</p> <p>Weight 2,600 (typ.), 2,900 (max.)</p> <p>(3) page 9/29</p> <p>4.3.1 Driving for LCD panel signal processing board</p> <p>Supply current ICC - TBD Note1 1,000 Note2</p> <p>→</p> <p>page 9/33</p> <p>4.3.1 Driving for LCD panel signal processing board</p> <p>Supply current ICC - 670 Note1 1,000 Note2</p> <p>(4) page 9/29</p> <p>4.3.2 Driving for backlight inverter</p> <table border="0" style="width: 100%;"> <tr> <td>Supply current</td> <td>IDDDB</td> <td>-</td> <td>TBD</td> <td>TBD</td> </tr> <tr> <td>BRTP signal</td> <td>IiBPL</td> <td>-1,580</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td>IiBPH</td> <td>-</td> <td>-</td> <td>3,500</td> </tr> <tr> <td>PWSEL signal</td> <td>IiBSL</td> <td>-810</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td>IiBSH</td> <td>-</td> <td>-</td> <td>440</td> </tr> </table> <p><i>(This part continues to the next page.)</i></p>	Supply current	IDDDB	-	TBD	TBD	BRTP signal	IiBPL	-1,580	-	-		IiBPH	-	-	3,500	PWSEL signal	IiBSL	-810	-	-		IiBSH	-	-	440
Supply current	IDDDB	-	TBD	TBD																								
BRTP signal	IiBPL	-1,580	-	-																								
	IiBPH	-	-	3,500																								
PWSEL signal	IiBSL	-810	-	-																								
	IiBSH	-	-	440																								

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																																																																						
3rd edition	DOD - M - 0694	Oct. 22, 2001	<p style="text-align: center;"><i>(This part continues from the front page.)</i></p> <p>→</p> <p>page 9/33 4.3.2 Driving for backlight inverter</p> <table style="margin-left: 40px;"> <tr> <td>Supply current</td> <td>IDDB</td> <td>-</td> <td>4,500</td> <td>5,000</td> </tr> <tr> <td rowspan="2">BRTP signal</td> <td>IBPL</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>IBPH</td> <td>-</td> <td>-</td> <td>TBD</td> </tr> <tr> <td rowspan="2">PWSEL signal</td> <td>IBSL</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>IBSH</td> <td>-</td> <td>-</td> <td>TBD</td> </tr> </table> <p>(5) page 10/29 4.3.4 Fuses</p> <table border="1" style="margin-left: 40px; width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Fuse</th> <th rowspan="2">Rating Note1</th> <th rowspan="2">Unit</th> <th rowspan="2">Remarks</th> </tr> <tr> <th>Type</th> <th>Supplier</th> </tr> </thead> <tbody> <tr> <td rowspan="2">TBD</td> <td rowspan="2">TBD</td> <td>TBD</td> <td>A</td> <td rowspan="2">VCC (for LCD panel signal processing board)</td> </tr> <tr> <td>TBD</td> <td>V</td> </tr> <tr> <td rowspan="2">TBD</td> <td rowspan="2">TBD</td> <td>TBD</td> <td>A</td> <td rowspan="2">VDDDB (for backlight inverter)</td> </tr> <tr> <td>TBD</td> <td>V</td> </tr> </tbody> </table> <p style="margin-left: 40px;">Note1: The power capacity should be more than twice of fuse current ratings. If the power capacity is less than the criteria value, the fuse may not blow, and then nasty smell, smoking and so on may occur.</p> <p>→</p> <p>page 10/33 4.3.4 Fuses</p> <table border="1" style="margin-left: 40px; width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Fusing line</th> <th colspan="2">Fuse</th> <th rowspan="2">Rating</th> <th rowspan="2">Unit</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Type</th> <th>Supplier</th> </tr> </thead> <tbody> <tr> <td rowspan="2">VCC</td> <td rowspan="2">ICP-S2.3</td> <td rowspan="2">Rohm Co., Ltd.</td> <td>4.6</td> <td>A</td> <td>Fusing current Note1</td> </tr> <tr> <td>50</td> <td>V</td> <td>-</td> </tr> <tr> <td rowspan="2">VDDDB</td> <td rowspan="2">R451010</td> <td rowspan="2">Littelfuse Inc.</td> <td>20</td> <td>A</td> <td>Fusing current Note1</td> </tr> <tr> <td>125</td> <td>V</td> <td>-</td> </tr> </tbody> </table> <p style="margin-left: 40px;">Note1: The power capacity should be more than the fusing current rating. If the power capacity is less than the criteria value, the fuse may not blow, and then nasty smell, smoking and so on may occur.</p> <p>(6) page 11/29 4.4.1 Sequence for LCD panel signal processing board Tr < 80ms</p> <p>→</p> <p>page 11/33 4.4.1 Sequence for LCD panel signal processing board 5ms < Tr < 80ms</p> <p>(7) page 13/29 4.5.2 Backlight inverter CN202 2 N.C. Non-connection</p> <p>→</p> <p>page 13/33 4.5.2 Backlight inverter CN202 2 GNDB Backlight ground</p>	Supply current	IDDB	-	4,500	5,000	BRTP signal	IBPL	TBD	-	-	IBPH	-	-	TBD	PWSEL signal	IBSL	TBD	-	-	IBSH	-	-	TBD	Fuse		Rating Note1	Unit	Remarks	Type	Supplier	TBD	TBD	TBD	A	VCC (for LCD panel signal processing board)	TBD	V	TBD	TBD	TBD	A	VDDDB (for backlight inverter)	TBD	V	Fusing line	Fuse		Rating	Unit	Remark	Type	Supplier	VCC	ICP-S2.3	Rohm Co., Ltd.	4.6	A	Fusing current Note1	50	V	-	VDDDB	R451010	Littelfuse Inc.	20	A	Fusing current Note1	125	V	-
Supply current	IDDB	-	4,500	5,000																																																																					
BRTP signal	IBPL	TBD	-	-																																																																					
	IBPH	-	-	TBD																																																																					
PWSEL signal	IBSL	TBD	-	-																																																																					
	IBSH	-	-	TBD																																																																					
Fuse		Rating Note1	Unit	Remarks																																																																					
Type	Supplier																																																																								
TBD	TBD	TBD	A	VCC (for LCD panel signal processing board)																																																																					
		TBD	V																																																																						
TBD	TBD	TBD	A	VDDDB (for backlight inverter)																																																																					
		TBD	V																																																																						
Fusing line	Fuse		Rating	Unit	Remark																																																																				
	Type	Supplier																																																																							
VCC	ICP-S2.3	Rohm Co., Ltd.	4.6	A	Fusing current Note1																																																																				
			50	V	-																																																																				
VDDDB	R451010	Littelfuse Inc.	20	A	Fusing current Note1																																																																				
			125	V	-																																																																				

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																																																																																																																																																																															
3rd edition	DOD - M - 0694	Oct. 22, 2001	<p>(8) page 16/29 4.6.2 Detail of PWM timing (2) Each parameter</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 10px;"> <thead> <tr> <th>Parameter</th> <th>Symbol</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Unit</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>Luminance control frequency</td> <td>1/tPW</td> <td>185</td> <td>255</td> <td>325</td> <td>Hz</td> <td>Note1</td> </tr> <tr> <td>Duty ratio</td> <td>tPWH/tPW</td> <td>0.2</td> <td>-</td> <td>1.0</td> <td>-</td> <td>Note2</td> </tr> <tr> <td>Non signal period</td> <td>tPWN</td> <td>0</td> <td>-</td> <td>50</td> <td>ms</td> <td>Note3</td> </tr> </tbody> </table> <p style="text-align: center;">→</p> <p>page 16/33 4.6.2 Detail of PWM timing (2) Each parameter</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 10px;"> <thead> <tr> <th>Parameter</th> <th>Symbol Note1</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Unit</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>Luminance control frequency</td> <td>FL</td> <td>230</td> <td>255</td> <td>280</td> <td>Hz</td> <td>Note2</td> </tr> <tr> <td>Duty ratio</td> <td>DL</td> <td>0.2</td> <td>-</td> <td>1.0</td> <td>-</td> <td>Note3</td> </tr> <tr> <td>Non signal period</td> <td>tPWN</td> <td>0</td> <td>-</td> <td>50</td> <td>ms</td> <td>Note4</td> </tr> </tbody> </table> <p>(9) page 21/29 4.11.1 Optical characteristics</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Parameter</th> <th>Note1</th> <th>Symbol</th> <th>Condition</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Unit</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>Contrast ratio</td> <td></td> <td>CR</td> <td>White/Black at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$</td> <td>200</td> <td>TBD</td> <td>-</td> <td>-</td> <td>Note2</td> </tr> <tr> <td>Luminance</td> <td></td> <td>L</td> <td>White at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$</td> <td>TBD</td> <td>450</td> <td>-</td> <td>cd/m²</td> <td>-</td> </tr> <tr> <td>Luminance uniformity</td> <td></td> <td>LU</td> <td>-</td> <td>-</td> <td>TBD</td> <td>1.30</td> <td>-</td> <td>Note3</td> </tr> <tr> <td rowspan="4">Chromaticity</td> <td></td> <td>W</td> <td>White (x, y)</td> <td>-</td> <td>0.300, 0.315</td> <td>-</td> <td>-</td> <td rowspan="4">-</td> </tr> <tr> <td></td> <td>R</td> <td>Red (x, y)</td> <td>-</td> <td>TBD, TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td>G</td> <td>Green (x, y)</td> <td>-</td> <td>TBD, TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td></td> <td>B</td> <td>Blue (x, y)</td> <td>-</td> <td>TBD, TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>Color gamut</td> <td></td> <td>C</td> <td>$\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$ at center, against NTSC color space</td> <td>50</td> <td>60</td> <td>-</td> <td>%</td> <td></td> </tr> <tr> <td rowspan="2">Response time Note4</td> <td></td> <td>Ton</td> <td>Black to White</td> <td>-</td> <td>TBD</td> <td>TBD</td> <td>ms</td> <td rowspan="2">Note5</td> </tr> <tr> <td></td> <td>Toff</td> <td>White to Black</td> <td>-</td> <td>TBD</td> <td>TBD</td> <td>ms</td> </tr> <tr> <td rowspan="4">Viewing angle</td> <td rowspan="4">CR=10</td> <td>Right</td> <td>θ_R</td> <td>$\theta_U = 0^\circ, \theta_D = 0^\circ$</td> <td>-</td> <td>85</td> <td>-</td> <td rowspan="4">°</td> <td rowspan="4">Note6</td> </tr> <tr> <td>Left</td> <td>θ_L</td> <td>$\theta_U = 0^\circ, \theta_D = 0^\circ$</td> <td>-</td> <td>85</td> <td>-</td> </tr> <tr> <td>Up</td> <td>θ_U</td> <td>$\theta_R = 0^\circ, \theta_L = 0^\circ$</td> <td>-</td> <td>85</td> <td>-</td> </tr> <tr> <td>Down</td> <td>θ_D</td> <td>$\theta_R = 0^\circ, \theta_L = 0^\circ$</td> <td>-</td> <td>85</td> <td>-</td> </tr> </tbody> </table> <p style="text-align: center;"><i>(This part continues to the next page.)</i></p>	Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks	Luminance control frequency	1/tPW	185	255	325	Hz	Note1	Duty ratio	tPWH/tPW	0.2	-	1.0	-	Note2	Non signal period	tPWN	0	-	50	ms	Note3	Parameter	Symbol Note1	Min.	Typ.	Max.	Unit	Remarks	Luminance control frequency	FL	230	255	280	Hz	Note2	Duty ratio	DL	0.2	-	1.0	-	Note3	Non signal period	tPWN	0	-	50	ms	Note4	Parameter	Note1	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks	Contrast ratio		CR	White/Black at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	200	TBD	-	-	Note2	Luminance		L	White at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	TBD	450	-	cd/m ²	-	Luminance uniformity		LU	-	-	TBD	1.30	-	Note3	Chromaticity		W	White (x, y)	-	0.300, 0.315	-	-	-		R	Red (x, y)	-	TBD, TBD	-	-		G	Green (x, y)	-	TBD, TBD	-	-		B	Blue (x, y)	-	TBD, TBD	-	-	Color gamut		C	$\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$ at center, against NTSC color space	50	60	-	%		Response time Note4		Ton	Black to White	-	TBD	TBD	ms	Note5		Toff	White to Black	-	TBD	TBD	ms	Viewing angle	CR=10	Right	θ_R	$\theta_U = 0^\circ, \theta_D = 0^\circ$	-	85	-	°	Note6	Left	θ_L	$\theta_U = 0^\circ, \theta_D = 0^\circ$	-	85	-	Up	θ_U	$\theta_R = 0^\circ, \theta_L = 0^\circ$	-	85	-	Down	θ_D	$\theta_R = 0^\circ, \theta_L = 0^\circ$	-	85	-
Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																												
Luminance control frequency	1/tPW	185	255	325	Hz	Note1																																																																																																																																																																												
Duty ratio	tPWH/tPW	0.2	-	1.0	-	Note2																																																																																																																																																																												
Non signal period	tPWN	0	-	50	ms	Note3																																																																																																																																																																												
Parameter	Symbol Note1	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																												
Luminance control frequency	FL	230	255	280	Hz	Note2																																																																																																																																																																												
Duty ratio	DL	0.2	-	1.0	-	Note3																																																																																																																																																																												
Non signal period	tPWN	0	-	50	ms	Note4																																																																																																																																																																												
Parameter	Note1	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																																																										
Contrast ratio		CR	White/Black at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	200	TBD	-	-	Note2																																																																																																																																																																										
Luminance		L	White at center $\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$	TBD	450	-	cd/m ²	-																																																																																																																																																																										
Luminance uniformity		LU	-	-	TBD	1.30	-	Note3																																																																																																																																																																										
Chromaticity		W	White (x, y)	-	0.300, 0.315	-	-	-																																																																																																																																																																										
		R	Red (x, y)	-	TBD, TBD	-	-																																																																																																																																																																											
		G	Green (x, y)	-	TBD, TBD	-	-																																																																																																																																																																											
		B	Blue (x, y)	-	TBD, TBD	-	-																																																																																																																																																																											
Color gamut		C	$\theta_R = 0^\circ, \theta_L = 0^\circ, \theta_U = 0^\circ, \theta_D = 0^\circ$ at center, against NTSC color space	50	60	-	%																																																																																																																																																																											
Response time Note4		Ton	Black to White	-	TBD	TBD	ms	Note5																																																																																																																																																																										
		Toff	White to Black	-	TBD	TBD	ms																																																																																																																																																																											
Viewing angle	CR=10	Right	θ_R	$\theta_U = 0^\circ, \theta_D = 0^\circ$	-	85	-	°	Note6																																																																																																																																																																									
		Left	θ_L	$\theta_U = 0^\circ, \theta_D = 0^\circ$	-	85	-																																																																																																																																																																											
		Up	θ_U	$\theta_R = 0^\circ, \theta_L = 0^\circ$	-	85	-																																																																																																																																																																											
		Down	θ_D	$\theta_R = 0^\circ, \theta_L = 0^\circ$	-	85	-																																																																																																																																																																											

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																																																																																																																																																
3rd edition	DOD - M - 0694	Oct. 22, 2001	<p style="text-align: center;"><i>(This part continues from the front page.)</i></p> <p>→ page 21/33 4.6.2 Detail of PWM timing</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 20px;"> <thead> <tr> <th>Parameter</th> <th>Note1</th> <th>Condition</th> <th>Symbol</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Unit</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>Contrast ratio</td> <td></td> <td>White/Black at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$</td> <td>CR</td> <td>200</td> <td>350</td> <td>-</td> <td>-</td> <td>Note2</td> </tr> <tr> <td>Luminance</td> <td></td> <td>White at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$</td> <td>L</td> <td>TBD</td> <td>450</td> <td>-</td> <td>cd/m²</td> <td>-</td> </tr> <tr> <td>Luminance uniformity</td> <td></td> <td>-</td> <td>LU</td> <td>-</td> <td>TBD</td> <td>1.30</td> <td>-</td> <td>Note3</td> </tr> <tr> <td rowspan="6" style="text-align: center;">Chromaticity</td> <td rowspan="2" style="text-align: center;">White</td> <td>x coordinate</td> <td>Wx</td> <td>-</td> <td>0.300</td> <td>-</td> <td>-</td> <td rowspan="6" style="text-align: center;">Note4</td> </tr> <tr> <td>y coordinate</td> <td>Wy</td> <td>-</td> <td>0.315</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Red</td> <td>x coordinate</td> <td>Rx</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>y coordinate</td> <td>Ry</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Green</td> <td>x coordinate</td> <td>Gx</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>y coordinate</td> <td>Gy</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Blue</td> <td>x coordinate</td> <td>Bx</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>y coordinate</td> <td>By</td> <td>-</td> <td>TBD</td> <td>-</td> <td>-</td> </tr> <tr> <td>Color gamut</td> <td></td> <td>$\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$ at center, against NTSC color space</td> <td>C</td> <td>50</td> <td>72</td> <td>-</td> <td>%</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Response time</td> <td></td> <td>White to Black</td> <td>Ton</td> <td>-</td> <td>12</td> <td>TBD</td> <td>ms</td> <td>Note5</td> </tr> <tr> <td></td> <td>Black to White</td> <td>Toff</td> <td>-</td> <td>12</td> <td>TBD</td> <td>ms</td> <td>Note6</td> </tr> <tr> <td rowspan="4" style="text-align: center;">Viewing angle</td> <td rowspan="4" style="text-align: center;">CR = 10</td> <td>Right</td> <td>$\theta U = 0^\circ, \theta D = 0^\circ$</td> <td>$\theta R$</td> <td>-</td> <td>85</td> <td>-</td> <td rowspan="4" style="text-align: center;">Note7</td> </tr> <tr> <td>Left</td> <td>$\theta U = 0^\circ, \theta D = 0^\circ$</td> <td>$\theta L$</td> <td>-</td> <td>85</td> <td>-</td> </tr> <tr> <td>Up</td> <td>$\theta R = 0^\circ, \theta L = 0^\circ$</td> <td>$\theta U$</td> <td>-</td> <td>85</td> <td>-</td> <td>-</td> </tr> <tr> <td>Down</td> <td>$\theta R = 0^\circ, \theta L = 0^\circ$</td> <td>$\theta D$</td> <td>-</td> <td>85</td> <td>-</td> <td>-</td> </tr> </tbody> </table> <p>Writer</p> <p style="text-align: center;"> <i>Approved by</i> _____ <i>Checked by</i> _____ <i>Prepared by</i> _____ T. ITO _____ A. SAWADA </p>	Parameter	Note1	Condition	Symbol	Min.	Typ.	Max.	Unit	Remarks	Contrast ratio		White/Black at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	CR	200	350	-	-	Note2	Luminance		White at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	L	TBD	450	-	cd/m ²	-	Luminance uniformity		-	LU	-	TBD	1.30	-	Note3	Chromaticity	White	x coordinate	Wx	-	0.300	-	-	Note4	y coordinate	Wy	-	0.315	-	-	Red	x coordinate	Rx	-	TBD	-	-	y coordinate	Ry	-	TBD	-	-	Green	x coordinate	Gx	-	TBD	-	-	y coordinate	Gy	-	TBD	-	-	Blue	x coordinate	Bx	-	TBD	-	-	y coordinate	By	-	TBD	-	-	Color gamut		$\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$ at center, against NTSC color space	C	50	72	-	%	Response time		White to Black	Ton	-	12	TBD	ms	Note5		Black to White	Toff	-	12	TBD	ms	Note6	Viewing angle	CR = 10	Right	$\theta U = 0^\circ, \theta D = 0^\circ$	θR	-	85	-	Note7	Left	$\theta U = 0^\circ, \theta D = 0^\circ$	θL	-	85	-	Up	$\theta R = 0^\circ, \theta L = 0^\circ$	θU	-	85	-	-	Down	$\theta R = 0^\circ, \theta L = 0^\circ$	θD	-	85	-	-
Parameter	Note1	Condition	Symbol	Min.	Typ.	Max.	Unit	Remarks																																																																																																																																											
Contrast ratio		White/Black at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	CR	200	350	-	-	Note2																																																																																																																																											
Luminance		White at center $\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$	L	TBD	450	-	cd/m ²	-																																																																																																																																											
Luminance uniformity		-	LU	-	TBD	1.30	-	Note3																																																																																																																																											
Chromaticity	White	x coordinate	Wx	-	0.300	-	-	Note4																																																																																																																																											
		y coordinate	Wy	-	0.315	-	-																																																																																																																																												
	Red	x coordinate	Rx	-	TBD	-	-																																																																																																																																												
		y coordinate	Ry	-	TBD	-	-																																																																																																																																												
	Green	x coordinate	Gx	-	TBD	-	-																																																																																																																																												
		y coordinate	Gy	-	TBD	-	-																																																																																																																																												
Blue	x coordinate	Bx	-	TBD	-	-																																																																																																																																													
	y coordinate	By	-	TBD	-	-																																																																																																																																													
Color gamut		$\theta R = 0^\circ, \theta L = 0^\circ, \theta U = 0^\circ, \theta D = 0^\circ$ at center, against NTSC color space	C	50	72	-	%																																																																																																																																												
Response time		White to Black	Ton	-	12	TBD	ms	Note5																																																																																																																																											
		Black to White	Toff	-	12	TBD	ms	Note6																																																																																																																																											
Viewing angle	CR = 10	Right	$\theta U = 0^\circ, \theta D = 0^\circ$	θR	-	85	-	Note7																																																																																																																																											
		Left	$\theta U = 0^\circ, \theta D = 0^\circ$	θL	-	85	-																																																																																																																																												
		Up	$\theta R = 0^\circ, \theta L = 0^\circ$	θU	-	85	-		-																																																																																																																																										
		Down	$\theta R = 0^\circ, \theta L = 0^\circ$	θD	-	85	-		-																																																																																																																																										
4th edition	DOD - M - 0807	Dec. 7, 2001	<p>Revision contents</p> <ul style="list-style-type: none"> • Change part (Before-3rd edition → After-4th edition) <p>(1) page 27/33 7.2 REAR VIEW → page 27/33 7.2 REAR VIEW is revised.</p> <p>Writer</p> <p style="text-align: center;"> <i>Approved by</i> _____ <i>Checked by</i> _____ <i>Prepared by</i> _____ T. ITO _____ R. KAWASHIMA </p>																																																																																																																																																

PRELIMINARY

REVISION HISTORY

Edition	Document number	Prepared date	Revision contents and writer																																																																																																														
5th edition	DOD - M - 0895	Feb. 21, 2002	<p>Revision contents</p> <ul style="list-style-type: none"> • Change part (Before-4th edition → After-5th edition) <p>(1) page 8/34 4.2 ABSOLUTE MAXIMUM RATINGS Absolute humidity AH: $\leq 78 \text{ g/m}^3 \rightarrow \leq 73 \text{ g/m}^3$ (correction)</p> <p>(2) page 9/34 4.3.2 Driving for backlight inverter</p> <table style="margin-left: 40px; border-collapse: collapse;"> <thead> <tr> <th></th> <th style="text-align: center;">min.</th> <th style="text-align: center;">typ.</th> <th style="text-align: center;">max.</th> <th style="text-align: center;">min.</th> <th style="text-align: center;">typ.</th> <th style="text-align: center;">max.</th> <th></th> </tr> </thead> <tbody> <tr> <td>VBI(V)</td> <td style="text-align: center;">0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">1.2</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">1.0 (correction)</td> </tr> <tr> <td>VBPH(V)</td> <td style="text-align: center;">2.0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">5.2</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">2.0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">5.0 (correction)</td> </tr> <tr> <td>VBCL(V)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">0.8</td> </tr> <tr> <td>VBCH(V)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">2.0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">5.0</td> </tr> <tr> <td>VBSL(V)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">0.8</td> </tr> <tr> <td>VBSH(V)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">2.0</td> <td style="text-align: center;">-</td> <td style="text-align: center;">5.0</td> </tr> <tr> <td>IBI(μA)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-130</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> </tr> <tr> <td>IBPL(μA)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-1580</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> </tr> <tr> <td>IBPH(μA)</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">3500</td> </tr> <tr> <td>IBCL(μA)</td> <td style="text-align: center;">-810</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-610</td> <td style="text-align: center;">-</td> <td style="text-align: center;">- (correction)</td> </tr> <tr> <td>IBSL(μA)</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-610</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> </tr> <tr> <td>IBSH(μA)</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">TBD</td> <td style="text-align: center;">\rightarrow</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">440</td> </tr> </tbody> </table> <p>(3) page 16/34 4.6.2 Detail of PWM timing Symbol is corrected. tPWN \rightarrow tPWL</p> <p>(4) page 26/34 7.1 FRONT VIEW 33.0\pm0.5mm \rightarrow 30.1\pm2.0mm</p> <p>Writer</p> <table style="width: 100%; margin-left: 40px;"> <tr> <td style="text-align: center;"><i>Approved by</i></td> <td style="text-align: center;"><i>Checked by</i></td> <td style="text-align: center;"><i>Prepared by</i></td> </tr> <tr> <td style="text-align: center;">T. ITO</td> <td style="text-align: center;">_____</td> <td style="text-align: center;">R. KAWASHIMA</td> </tr> </table>		min.	typ.	max.	min.	typ.	max.		VBI(V)	0	-	1.2	\rightarrow	0	-	1.0 (correction)	VBPH(V)	2.0	-	5.2	\rightarrow	2.0	-	5.0 (correction)	VBCL(V)	TBD	-	TBD	\rightarrow	0	-	0.8	VBCH(V)	TBD	-	TBD	\rightarrow	2.0	-	5.0	VBSL(V)	TBD	-	TBD	\rightarrow	0	-	0.8	VBSH(V)	TBD	-	TBD	\rightarrow	2.0	-	5.0	IBI(μA)	TBD	-	-	\rightarrow	-130	-	-	IBPL(μA)	TBD	-	-	\rightarrow	-1580	-	-	IBPH(μA)	-	-	TBD	\rightarrow	-	-	3500	IBCL(μA)	-810	-	-	\rightarrow	-610	-	- (correction)	IBSL(μA)	TBD	-	-	\rightarrow	-610	-	-	IBSH(μA)	-	-	TBD	\rightarrow	-	-	440	<i>Approved by</i>	<i>Checked by</i>	<i>Prepared by</i>	T. ITO	_____	R. KAWASHIMA
	min.	typ.	max.	min.	typ.	max.																																																																																																											
VBI(V)	0	-	1.2	\rightarrow	0	-	1.0 (correction)																																																																																																										
VBPH(V)	2.0	-	5.2	\rightarrow	2.0	-	5.0 (correction)																																																																																																										
VBCL(V)	TBD	-	TBD	\rightarrow	0	-	0.8																																																																																																										
VBCH(V)	TBD	-	TBD	\rightarrow	2.0	-	5.0																																																																																																										
VBSL(V)	TBD	-	TBD	\rightarrow	0	-	0.8																																																																																																										
VBSH(V)	TBD	-	TBD	\rightarrow	2.0	-	5.0																																																																																																										
IBI(μA)	TBD	-	-	\rightarrow	-130	-	-																																																																																																										
IBPL(μA)	TBD	-	-	\rightarrow	-1580	-	-																																																																																																										
IBPH(μA)	-	-	TBD	\rightarrow	-	-	3500																																																																																																										
IBCL(μA)	-810	-	-	\rightarrow	-610	-	- (correction)																																																																																																										
IBSL(μA)	TBD	-	-	\rightarrow	-610	-	-																																																																																																										
IBSH(μA)	-	-	TBD	\rightarrow	-	-	440																																																																																																										
<i>Approved by</i>	<i>Checked by</i>	<i>Prepared by</i>																																																																																																															
T. ITO	_____	R. KAWASHIMA																																																																																																															
6th edition	DOD-M-0921	Mar. 1, 2002	<p>Revision contents</p> <ul style="list-style-type: none"> • Change part (Before-5th edition → After-6th edition) <p>(1) page 6/34 Module size: 33.0(D) mm \rightarrow 30.1(D) mm (correction)</p> <p>(2) page 8/34 Module size: 33.0 \pm 0.5 (D) mm \rightarrow 30.1 \pm 2.0 (D) mm (correction)</p> <p>(3) page 12/34 Adaptable plug: "FI-S20S" is added.</p> <p>Writer</p> <table style="width: 100%; margin-left: 40px;"> <tr> <td style="text-align: center;"><i>Approved by</i></td> <td style="text-align: center;"><i>Checked by</i></td> <td style="text-align: center;"><i>Prepared by</i></td> </tr> <tr> <td style="text-align: center;">T. ITO</td> <td style="text-align: center;">_____</td> <td style="text-align: center;">R. KAWASHIMA</td> </tr> </table>	<i>Approved by</i>	<i>Checked by</i>	<i>Prepared by</i>	T. ITO	_____	R. KAWASHIMA																																																																																																								
<i>Approved by</i>	<i>Checked by</i>	<i>Prepared by</i>																																																																																																															
T. ITO	_____	R. KAWASHIMA																																																																																																															

